



LIGHT TN

Architectural & Landscape Lighting

PRODUCT CATALOG

LIGHTTN.COM | 615.808.8882



2024 EDITION

OUR LUXURY COLLECTION OF BOLLARDS.

PROUDLY MADE IN THE USA



Center Square | 489521 - 6x6x25
489522 - 6x6x42 | 489554 - 4x4x25 (17" vector)
489555 - 4x4x25 (8" vector) Uses MR8 or MR16 lamp

Curvaceous
489505 - 6x6x25 | 489506 - 6x6x42
Uses MR8 or MR16 lamp

D-Vine
489550 - 4x4x25 | 489529 - 6x6x25
489530 - 6x6x42 | Uses MR8 or MR16 lamp

Deco Drive
489513 - 6x6x25 | 489514 - 6x6x42
Uses MR8 or MR16 lamp

SILHOUETTE COLLECTION

Statuesque by day and celestial by night, our precision-formed **Silhouette Collection** of decorative bollards are made from the finest architectural-grade aluminum alloy, for remarkable strength and resistance to corrosion.

Garden Of Zen
489501 - 6x6x25 | 489502 - 6x6x42
Uses MR8 or MR16 lamp

Sailboat
489533 - 6x6x25 | 489534 - 6x6x42
Uses MR8 or MR16 lamp

Sunny Moon
489509 - 6x6x25 | 489510 - 6x6x42
Uses MR8 or MR16 lamp

Swirls
489525 - 6x6x25 | 489526 - 6x6x42
Uses MR8 or MR16 lamp

XO
489552 - 4x4x25 | Uses MR8 or MR16 lamp
489537 - 6x6x25 | Uses MR8 or MR16 lamp
489538 - 6x6x42 | Uses MR8 or MR16 lamp

Yin Yang Koi
489517 - 6x6x25 | 489518 - 6x6x42
Uses MR8 or MR16 lamp

Jade | 600202 - 39" direct burial
600594 - 48" direct burial | 600620 - 39" surface mount
600622 - 48" surface mount

MINIMALIST SERIES

Our Minimalist Series bollards are an excellent solution when a project involves the use of simple design elements, without ornamentation or decoration. This series pairs well with minimalist architectural designs.

Beach Club 6"×6"×25"
489582
MR16 lamp

Conrad 4"×4"×25"
489577
MR16 lamp

Sausalito 4"×4"×25"
489580
MR16 lamp

Tiburon 4"×4"×36"
489581
MR16 lamp

Turnberry 6"×6"×42"
489583
MR16 lamp

PIER MOUNTS

Our aluminum Pier Mounts secure easily to walls or other raised surfaces, and cast enchanting shadows that create enhanced beauty to their immediate surroundings.

Center Square Lantern
6"×6"×18"
489519
MR16 lamp

Center Square Bollard/Post-Top
6"×6"×18"
489520
MR16 lamp

TRANSFORMERS & CONTROLS

High-quality transformers add to the efficiency and durability of your outdoor lighting project. All models conform to UL- and ETL-specifications and offer 92% to 95% regulation.



150W PROFESSIONAL GRADE
490541 - Stainless Steel
12-15V



300W PROFESSIONAL GRADE
490542 - Stainless Steel
12-15V



600W PROFESSIONAL GRADE
490543 - Stainless Steel
12-22V



75W PROFESSIONAL GRADE
Integrated Timer
490549 - Stainless Steel
12V



Astronomic
Pluggable Timer
DT200LT



PPC-8
Pluggable Photocell
600516



Astronomic Remote
Waterproof Timer HB880



SUNSET 12V
A/C Dimmer
501087

High-quality transformers add to the efficiency and durability of your outdoor lighting project.

Dauer transformers and controls offer options such as multitap selectable voltages, photocell sensors or sockets, timers or timer sockets, dimmers, and surge protection. All models conform to UL and ETL specifications and offer 92% to 95% regulation.





























INTRODUCING JARVIS Our 300W Wi-Fi SMART transformer in stainless steel.











Order #490545

- Three independent, zone-controlled channels with individual time scheduling.
- Wattage can be split into any configuration as long as a combined total of 300W is not exceeded, including wire load.
- Digital timer with astronomic feature (No purchase of additional timers or photocells needed).
- App is free, easy-to-use and shareable.
- App feature accounts for overall loads and power consumption.
- Digital power meter (app-specific function) allows viewing of real-time power consumption and monthly history.
- Holds multiple home runs per zone.
- Settings are saved in the cloud. No re-programming needed due to power loss.
- Wi-Fi based® (recommended). Bluetooth® also available. iOS™ and Android™ friendly. Amazon Alexa™ and Google Home™ voice compatible.

Wi-Fi® is a registered trademark of the Wi-Fi Alliance. Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG., Inc., iOS is a registered trademark of Cisco in the U.S. and other countries and is used under license by Apple Inc. Android is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com., Inc. The Google Home logo, Google Play, and the Google Play logo are all trademarks of Google LLC.











































UPLIGHTS	UPLIGHTS	UPLIGHTS	DOWNLIGHTS	DOWNLIGHTS
 <p>MR16 lamp</p> <p>ALBANY 490107</p> <p>A D</p>	 <p>MR16 lamp</p> <p>FAIRMONT 489920 489920-FS (floating socket) w/opt. 5" shroud 490055</p> <p>B D</p>	 <p>Opt. 6" shroud 489849</p> <p>MIRAGE See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>	 <p>MR16 lamp</p> <p>WINSTAR 490109</p> <p>A D</p>	 <p>MIRAGE V-2 See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>
 <p>MR16 lamp</p> <p>LEX 490105</p> <p>A D</p>	 <p>MR16 lamp</p> <p>ICON 490001 490001-FS (floating socket)</p> <p>B D</p>	 <p>Ext. Shroud 489146 (3/6W) Ext. Shroud 489147 (8/12/16W)</p> <p>MIRAGE V-2 See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>	 <p>MR16 lamp</p> <p>FISHER 489981</p> <p>B D</p>	 <p>Ext. Shroud 489146 (3/6W) Ext. Shroud 489147 (8/12/16W)</p> <p>MOONDANCE 489150-100 (12W) 489151-100 (16W) See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>
 <p>MR16 lamp</p> <p>ARIA 6" and 10" 489917-UP6 (6") 489917-UP10 (10")</p> <p>B D</p>	 <p>MR16 lamp</p> <p>MIGHTY MIGHT 490003 490003-FS (floating socket)</p> <p>B D</p>	 <p>BODACIOUS See Integrated Directional LED chart on page 18 for options.</p> <p>B I</p>	 <p>MR16 lamp</p> <p>SOHO 489980</p> <p>B D</p>	 <p>BODACIOUS See Integrated Directional LED chart on page 18 for options.</p> <p>B I</p>
 <p>MR16 lamp</p> <p>ASTOR 490007 490007-FS (floating socket)</p> <p>B D</p>	 <p>MR8 lamp</p> <p>RONEY 489990</p> <p>B D</p>	 <p>BODACIOUS Opt. 6" extended shrouds Shroud only - 490260 3W & 6W 490261 8W, 12W & 16W</p> <p>B I</p>	 <p>WATERFORD 489915 490054 (opt. 5" shroud)</p> <p>B D</p>	 <p>BODACIOUS Opt. 6" extended shrouds Shroud only - 490260 3W & 6W 490261 8W, 12W & 16W</p> <p>B I</p>
 <p>PAR36 lamp</p> <p>EPIC 490015</p> <p>B D</p>	 <p>MR16 lamp</p> <p>SAVANNAH 489901</p> <p>B D</p>	 <p>ELEMENT See Integrated Directional LED chart on page 19 for options.</p> <p>B I</p>	 <p>MATRIX See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>	 <p>ELEMENT See Integrated Directional LED chart on page 19 for options.</p> <p>B I</p>
 <p>MR16 and MR8 lamps</p> <p>EVERGLADES dual-source directional 489900</p> <p>B D</p>	 <p>MATRIX See Integrated Directional LED chart on page 19 for options.</p> <p>A I</p>			 <p>HARVEST MOON 490268 12W 630lm 5700K 490269 16W 832lm 5700K</p> <p>B I</p>

STEP LIGHTS

<p>4.6" wide</p>  <p>2.9" high</p> <p>B I</p> <p>BREAKERS 489927-2700K 2.7W 45lm 489927-3000K 2.7W 48lm</p>	<p>4.5" wide</p>  <p>2.9" high</p> <p>B I</p> <p>CAPE 489926-2700K 2.7W 18lm 489926-3000K 2.7W 20lm</p>	<p>4.5" wide</p>  <p>2.9" high</p> <p>B I</p> <p>HARBORVIEW 489925-2700K 2.7W 244lm 489925-3000K 2.7W 267lm</p>	<p>9" wide</p>  <p>2.9" high</p> <p>B I</p> <p>RIPTIDE 489930-2700K 3.5W 296lm 489930-3000K 3.5W 305lm</p>
<p>5.4" wide</p>  <p>2.9" high</p> <p>B I</p> <p>CABO 489928-2700K 4W 353lm 489928-3000K 4W 351lm</p>	<p>5.4" wide</p>  <p>2.9" high</p> <p>B I</p> <p>CATALINA 489929-2700K 4W 23lm 489929-3000K 4W 18lm</p>	<p>9.4" wide</p>  <p>2.9" high</p> <p>B I</p> <p>ISLANDER 489931-2700K 3.5W 20lm 489931-3000K 3.5W 21lm</p>	<p>7.25" wide</p>  <p>1.77" high</p> <p>B I</p> <p>SEACOAST 489932-2700K 1W 13lm 489932-3000K 1W 15lm</p>

FINISH: **A** Aluminum **B** Brass **C** Copper **SS** Stainless Steel

FIXTURE: **D** Drop-In **I** Integrated

PATH LIGHTS		PATH LIGHTS		PATH LIGHTS		PATH LIGHTS		PATH LIGHTS	
 AMANI (8" hat) 490111	Bi-Pin lamp <div>A D</div>	 ARIA 16" & 20" 489917-P16 (16") 489917-P20 (20")	Bi-Pin lamp <div>B D</div>	 OUTRIGGER 489907	MR16 or Bi-Pin lamp <div>B D</div>	 DAVOS 489160-18-27K-60 3.5W 323lm 489160-18-3K-60 3.5W 351lm	NEW <div>A I</div>	 BELMONT See Integrated Directional LED chart on page 18 for options.	<div>B I</div>
 ANTIGUA (6" hat) 490110	Bi-Pin lamp <div>A D</div>	 ARIA II 21" 489917-2XP21	MR16 lamp <div>B D</div>	 RECENT 489912	MR8 lamp <div>B D</div>	 FRESNO (6.21" hat) 489152-2700K 2W 200lm 489152-3000K 2W 200lm	<div>A I</div>	 DRAKE See Integrated Directional LED chart on page 18 for options.	<div>B I</div>
 BALI (6" hat) 490112	Bi-Pin lamp <div>A D</div>	 ATLANTIS (4" hat) 490019 Stem included.	Bi-Pin lamp <div>B D</div>	 SKY 489908	MR16 or Bi-Pin lamp <div>B D</div>	 MONTEREY (8.26" hat) 489157-2700K 5W 571lm 489157-3000K 5W 523lm 489158-2700K 3W 347lm 489158-3000K 3W 347lm	<div>A I</div>	 ELATION 16" & 22" 489870-16-2700K 489870-16-3000K 489871-22-2700K 489871-22-3000K	<div>B I</div>
 BRISTOL (8.5" hat) 490116	Bi-Pin lamp <div>A D</div>	 ENCLAVE 16" & 22" 489909-16 489909-22	Bi-Pin lamp <div>B D</div>	 TAJ 489913	MR8 lamp <div>B D</div>	 RAVEN 489161-18-27K-60 7W total 323lm/head 489161-18-3K-60 7W total 351lm/head	NEW <div>A I</div>	 HEMINGWAY (8.5" hat) 489916-2700K 3W 300lm 489916-3000K 3W 300lm	<div>B I</div>
 LOTUS (6" hat) 490115	Bi-Pin lamp <div>A D</div>	 FIREFLY 489904	MR16 <div>B D</div>	 TORTUGA w/ Citronella torch (8" hat) 490028	MR16 or Bi-Pin lamp 60" stem (490027) and Excalibur mounting stake included <div>B D</div>	 SONOMA (8.5" hat) 489154-2700K 3W 300lm 489154-3000K 3W 300lm	<div>A I</div>	 NEWPORT (6" hat) 489916-2700K 3W 300lm 489916-3000K 3W 300lm	<div>B I</div>
 TARA (6" hat) 490114	Bi-Pin lamp <div>A D</div>	 KONA-TIKI (7.5" hat) 490022	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	 WINDSOR (6" hat) 490016	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	 ARCHER SR. 30" 489914-2700K 4W 300lm 489914-3000K 4W 300lm	<div>B I</div>	 RAINIER 489911-2700K 4W 489911-3000K 4W 313lm (clear lens), 208lm or 155lm (frosted lens)	<div>B I</div>
 ANDROS (8.5" hat) 490017	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	 MANDARIN (12" hat) 490024	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	 ZEN (6.3" hat) 490020 (clear lens) 490021 (frosted lens) ZEN COMPLETE 490012 (hat & stem combo, clear lens)	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	PENDANTS			
 ARCHER 19" 489910	Bi-Pin lamp <div>B D</div>	 OMNI HALF-CUT (6.5" x 4.4" hat) 489905	Bi-Pin lamp 10" stem 490025 16" stem 490023 18" stem 490026 <div>B D</div>	 CARMEL (6.26" hat) 489156-2700K 3W 300lm 489156-3000K 3W 300lm	<div>A I</div>	 STARDUST 489924 MR16 or Bi-Pin lamp	<div>B D</div>	 COLONY 490088 MR16 or Bi-Pin lamp	<div>B D</div>
						 3" wide 8.5" high 3.5" wide	 Canopy mount included	 7" high 2" wide	 3" wide Canopy mount included

Lamps, where indicated with the drop-in fixtures, are sold separately. All aluminum Path Light hats come with stems and stakes included. Stems for all applicable brass Path Light hats are interchangeable and must be purchased separately, unless otherwise noted. Mounts for all downlight fixtures are sold separately.

PATH LIGHTS		WALL WASHERS		MARKER LIGHTS		MARKER LIGHTS		RAIL, DECK & DOCK LIGHTS	
<div><p>BELMONT See Integrated Directional LED chart on page 18 for options.</p></div>		<div><p>Bi-Pin lamp</p><p>BEACON 490053</p></div>		<div><p>1.75" wide 2.75" high</p><p>MR8 lamp</p><p>BRECKENRIDGE 489992</p></div>		<div><p>2.5" wide 1.6" high</p><p>DUNES 489881-2700K 1W 21lm 489881-3000K 1W 28lm</p></div>		<div><p>3.6" wide 1.8" high</p><p>Bi-Pin lamp</p><p>CRESCENT 490075</p></div>	
<div><p>DRAKE See Integrated Directional LED chart on page 18 for options.</p></div>		<div><p>MR16 lamp</p><p>DIPLOMAT 490010</p></div>		<div><p>1.75" wide 2.75" high</p><p>MR8 lamp</p><p>NOBLE 489994</p></div>		<div><p>2.9" wide 1.6" high</p><p>NEW</p><p>ELLIE 489883-2700K 1W 7lm 489883-3000K 1W 6lm</p></div>		<div><p>3.5" wide 1.7" high</p><p>Bi-Pin lamp</p><p>VENETIAN 490076</p></div>	
<div><p>NEW</p><p>ELATION 16" & 22" 489870-16-2700K 489870-16-3000K 489871-22-2700K 489871-22-3000K</p></div>		<div><p>Bi-Pin lamp</p><p>METROPOLITAN 490009</p></div>		<div><p>1.75" wide 2.75" high</p><p>MR8 lamp</p><p>WILLOW 489993</p></div>		<div><p>2.9" wide 1.6" high</p><p>NEW</p><p>NOOR 489885-2700K 1W 15lm 489885-3000K 1W 14lm</p></div>		<div><p>1" wide 1.3" long</p><p>BETSY 490073-2700K 490073-3000K 1W 120lm</p></div>	
<div><p>HEMINGWAY (8.5" hat) 489916-2700K 3W 300lm 489916-3000K 3W 300lm</p></div>		<div><p>ALUMINUM LED mini flood w/ opt. shroud See Integrated Directional LED chart on page 20 for options.</p></div>		<div><p>1.6" wide 2.5" high</p><p>NEW</p><p>BOWIE 489873-2700K 1W 19lm 489873-3000K 1W 27lm</p></div>		<div><p>2.9" wide 1.6" high</p><p>NEW</p><p>RAIDEN 489886-2700K 1W 12lm 489886-3000K 1W 12lm</p></div>		<div><p>1.9" wide 1.1" high</p><p>BUTTONWOOD 490074-2700K 490074-3000K 1W 150lm</p></div>	
<div><p>NEWPORT (6" hat) 489903-2700K 3W 300lm 489903-3000K 3W 300lm</p></div>		<div><p>BILTMORE See Integrated Directional LED chart on page 20 for options.</p></div>		<div><p>1.6" wide 2.5" high</p><p>NEW</p><p>HENDRIX 489872-2700K 1W 51lm 489872-3000K 1W 67lm</p></div>		<div><p>2.5" wide 1.6" high</p><p>SANDPIPER 489880-2700K 1W 51lm 489880-3000K 1W 67lm</p></div>		<div><p>3.3125" wide 1.125" high</p><p>AVALON 490095-2700K 490095-3000K</p></div>	
<div><p>RAINIER 489911-2700K 4W 313lm (clear lens), 208lm or 155lm (frosted lens)</p></div>		<div><p>WALDORF See Integrated Directional LED chart on page 20 for options.</p></div>		<div><p>1.6" wide 2.5" high</p><p>NEW</p><p>JAGGER 489874-2700K 1W 21lm 489874-3000K 1W 28lm</p></div>		<div><p>2.9" wide 1.6" high</p><p>NEW</p><p>SENARA 489884-2700K 1W 11lm 489884-3000K 1W 11lm</p></div>		<div><p>4.5" wide 6.6" long</p><p>MARINER Double-aperture 489935-2700K 489935-3000K 2.2W 220lm</p></div>	
WALL SCONES									
		<div><p>5" wide 16" high</p><p>MR16 lamp</p><p>VICEROY 600580</p></div>		<div><p>3" wide 9" high</p><p>MAUI 489860-2700K polished 489861-3000K polished 489862-2700K oxidized 489863-3000K oxidized</p></div>		<div><p>2.5" wide 1.6" high</p><p>WYNN 489882-2700K 1W 19lm 489882-3000K 1W 27lm</p></div>		<div><p>4.5" wide 6.6" long</p><p>MARINER Single-aperture 489934-2700K 489934-3000K 2.2W 220lm</p></div>	
		<div><p>2.3" wide 6" high</p><p>MR16 lamp</p><p>CABANA 490090</p></div>				<div><p>2.4" wide 3" high</p><p>VIBE Black 489997-2700K 3W 215lm 489997-3000K 3W 240lm</p></div>			

INGROUND LIGHTS		INGROUND LIGHTS		HARDSCAPE LIGHTS	
<div><div>4.7" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>BENTLEY 490063</div></div>		<div><div>5.5" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>ROSEWOOD 490070</div></div>		<div><div>7" wide</div><div>Bi-Pin lamp</div><div></div><div><div>B</div><div>D</div></div><div>CHURCHILL 490080</div></div>	<div><div>NEW</div><div></div><div>45° Angle</div><div>90° Angle</div><div><div>B</div><div>I</div></div><div>AXLE 490085-2W-2700K 490085-2W-3000K 490085-4W-2700K 490085-4W-3000K 140lm (2W) or 280lm (4W) (factory installed clear lens)</div></div>
<div><div>4" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>CHELSEA 490062</div></div>		<div><div>3.8" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>SOLARA 490066</div></div>		<div><div>6.8" wide</div><div></div><div><div>A</div><div>I</div></div><div>MANCHESTER 490128-2W-2700K 490128-2W-3000K 490128-4W-2700K 490128-4W-3000K 140lm (2W) or 280lm (4W) (factory installed clear lens)</div></div>	<div><div>6.8" wide</div><div></div><div><div>B</div><div>I</div></div><div>TIMBERLINE 490082-2W-2700K 490082-2W-3000K 490082-4W-2700K 490082-4W-3000K 140lm (2W) or 280lm (4W) (factory installed clear lens)</div></div>
<div><div>4.7" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>CONTEMPORARY 490068</div></div>		<div><div>3.8" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>TIDES 490064</div></div>		<div><div>4" wide</div><div></div><div><div>A</div><div>I</div></div><div>MANCHESTER JR 490127-2700K 490127-3000K 2.2W 220lm (factory installed clear lens)</div></div>	<div><div>4" wide</div><div></div><div><div>B</div><div>I</div></div><div>TIMBERLINE JR. 490081-2700K 490081-3000K 2.2W 220lm (factory installed clear lens)</div></div>
<div><div>3.8" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>DELANO 490065</div></div>		<div><div>6.5" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>WENTWORTH 490071</div></div>		<div><div>12" wide</div><div></div><div><div>A</div><div>I</div></div><div>MANCHESTER SR 490129-2700K 490129-3000K 4W 313lm (factory installed clear lens)</div></div>	<div><div>12" wide</div><div></div><div><div>B</div><div>I</div></div><div>TIMBERLINE SR. 490083-2700K 490083-3000K 4W 313lm (factory installed clear lens)</div></div>
<div><div>4.7" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>PALMS 490069</div></div>		<div><div>4.7" wide</div><div>MR16 lamp</div><div></div><div><div>B</div><div>D</div></div><div>ZEPHYR 490067</div></div>		<div><div>All hardscapes are offered with a quick disconnect option. To order, add a "-QD" after the respective fixture order number. For example, to order the Timberline with quick disconnect, order as 490082-2W-2700K-QD. Achieve approx. 33% lumen reduction with a lightly frosted lens. Achieve approx. 50% lumen reduction with a heavier frosted lens. Amber lens: Achieve approx. 60% lumen reduction for a dramatic ultra-warm effect.</div></div>	
<div><div>NEW</div><div></div><div>ORSON 490172 Aluminum black flat cover</div></div>		<div></div> <div>ORSON 490173 Brass flat cover Architectural bronze finish</div>		<div><div>1.75" wide</div><div>.95" high</div><div></div><div><div>SS</div><div>I</div></div><div>IRIS 489875 1.7W 40° 3000K 150lm</div></div>	
<div></div> <div>ORSON 490171 Well light body and gimble</div>	<div></div> <div>ORSON 490174 Aluminum black angled cover</div>	<div></div> <div>ORSON 490175 Brass angled cover Architectural bronze finish</div>	<div><div>2.6" wide</div><div>3.875" high</div><div></div><div><div>SS</div><div>I</div></div><div>NEPTUNE II 489999 3.5W 60° 3000K 238lm</div></div>		

All hardscapes are offered with a quick disconnect option.
 To order, add a "-QD" after the respective fixture order number.
 For example, to order the Timberline with quick disconnect, order as 490082-2W-2700K-QD.
 Achieve approx. 33% lumen reduction with a lightly frosted lens.
 Achieve approx. 50% lumen reduction with a heavier frosted lens.
 Amber lens: Achieve approx. 60% lumen reduction for a dramatic ultra-warm effect.

Cafe Lights

Product Features

- Vintage style Edison bulb
- Composed of commercial-grade, heavy-gauge wire
- Perfect for terraces and patios
- S14 12V LED Bulb
- 24" space between lights
- Durability with style



UL2108



Specifications

Fixture Type: Low Voltage LED Bulb

Color Temperature: 2200K

Material: Premium Grade Soda Lime Glass and Commercial-Grade 14AWG Wire

Wattage: 1W/bulb

Lumen Output: 80 lm

Operating Voltage: 9V - 15V AC

Light Source: S14 12V LED

Color Rendering Index: 80+


Wire Length: 48'

Accessories: Gripple® Stainless Steel Guide Wire Kit, Color LED S14 12V Bulbs

Listing: ETL, SJTW

Standard: UL 2108

Product Drawings

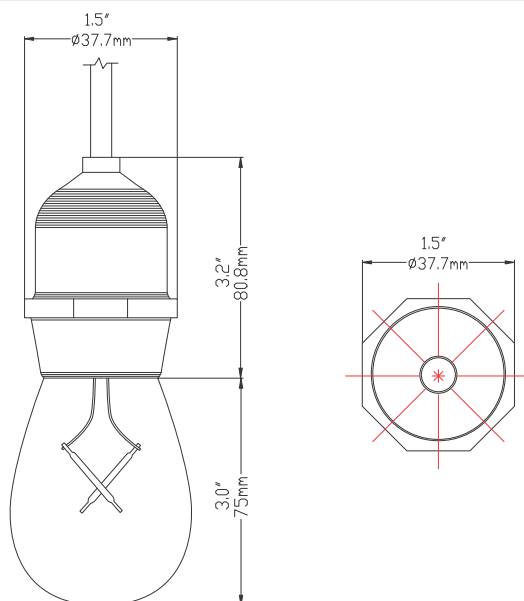

SL01 Up Light

Product Features

- Six lumen settings
- Single source LED chip for greater lux control
- Removable, drop-in optics
- Sleek, patent-pending design
- Enhanced strength from through bolt in the knuckle
- Plugs to prevent insect and moisture penetration



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze or Raw Brass

Wattage: 3W (min) - 12.9W (max)

Lumen Output: 230 lm - 730 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 11°, 25°, 40° (standard), 60°, and 80° (no optic)

Color Rendering Index: 92+

TM-30 Rf: 91

TM-30 Rg: 98

Lead Wire: 10' 18AWG


Mounting: 9" ABS Plastic Stake

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

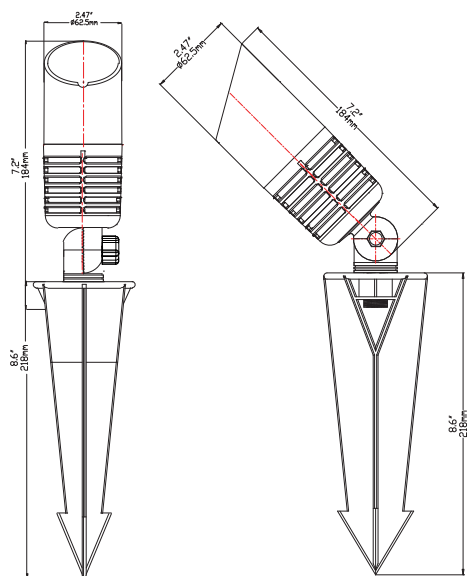

Adjustable Lumen Settings

No pins up: 730 lm (max)	3 pins up: 430 lm
1 pin up: 650 lm	4 pins up: 340 lm
2 pins up: 520 lm	All 5 pins up: 230 lm (min)

SL01N Narrow Spot Light

Product Features

- Six lumen settings
- Single source LED chip for greater lux control
- Locked-in, narrow optic
- Sleek, patent-pending design
- Enhanced strength from through bolt in the knuckle
- Plugs to prevent insect and moisture penetration



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze

Wattage: 3W (min) - 12.9W (max)

Lumen Output: 230 lm - 730 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 12°

Color Rendering Index: 92+

TM-30 Rf: 91

TM-30 Rg: 98

Lead Wire: 10' 18AWG


Mounting: 9" ABS Plastic Stake

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

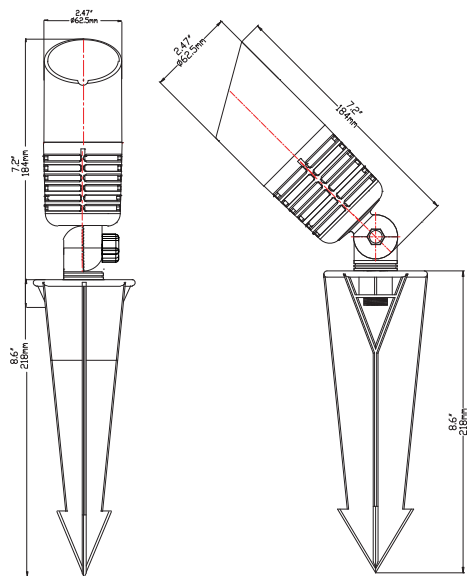


Adjustable Lumen Settings

No pins up: 730 lm (max)	3 pins up: 430 lm
1 pin up: 650 lm	4 pins up: 340 lm
2 pins up: 520 lm	All 5 pins up: 230 lm (min)

SL02 In Line Light

Product Features

- Compact size that disappears into hardscapes
- Solid brass construction and water tested
- Recessed LEDs with frosted lens for even light distribution and glare reduction
- Hidden bracket built inside the fixture for best look in exposed settings such as stacked stone walls
- 316 Stainless Steel mounting brackets for new construction, post construction, and deck mounting
- Wire groove holds a bonus 3.5" hidden wire for ease in serviceability

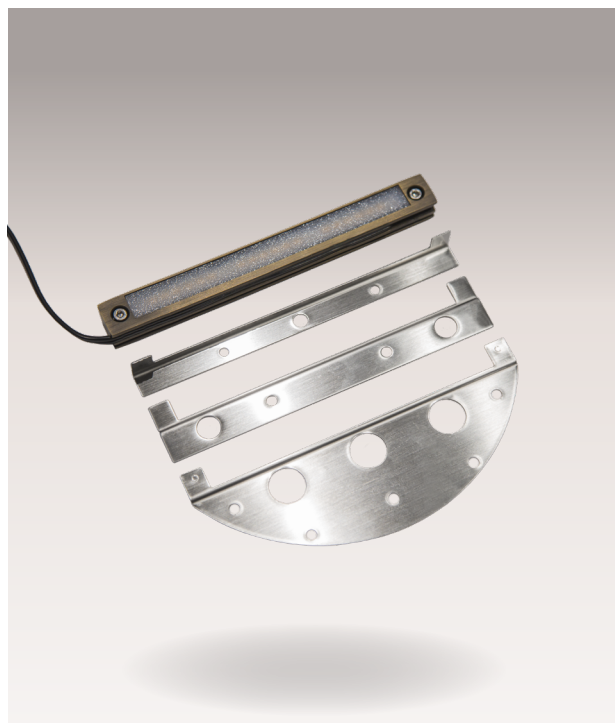

Specifications

Fixture Type: Integrated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating and 316 Stainless Steel

Finish: Antique Bronze

Wattage: 1W

Lumen Output: 60 lm

Operating Voltage: 9V - 15V AC

Light Source: Seoul LEDs

Lens: Frosted Lens

Color Rendering Index: 82+

TM-30 Rf: 84

TM-30 Rg: 95.9

Lead Wire: 15' 18AWG



Mounting: Post Construction, Existing Construction, and Deck Mounting Brackets (all 3 included)

Listing: ETL

Standard: UL 1838

Rating: IP67

Product Drawings

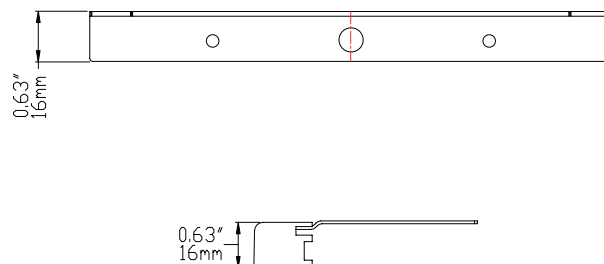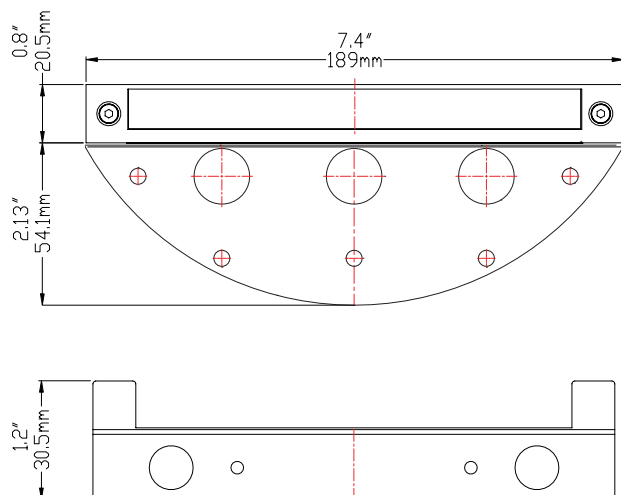

SL04 Mini Flood Light

Product Features

- Adjustable lumen output with 5 settings
- Compact size and solid brass construction
- Linear, wide-spread light with 110° beam angle
- Patented, sleek design
- Sturdy composition including heavy-duty knuckle with through bolt
- High quality CREE LED chips



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze or Raw Brass

Wattage: 1.5W (min) - 6.7W (max)

Lumen Output: 100 lm - 430 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LEDs

Beam Angle: 110.2H x 78.6V

Field Angle: 140.5H x 109.8V

Lens: Clear or Frosted

Color Rendering Index: 92+

TM-30 Rf: 90.5

TM-30 Rg: 100.8

Lead Wire: 10' 18AWG

Mounting: 9" ABS Plastic Stake (included)


Accessories: Hex Lens sold separately

Listing: ETL

Standard: UL1838

Rating: IP65

Product Drawings

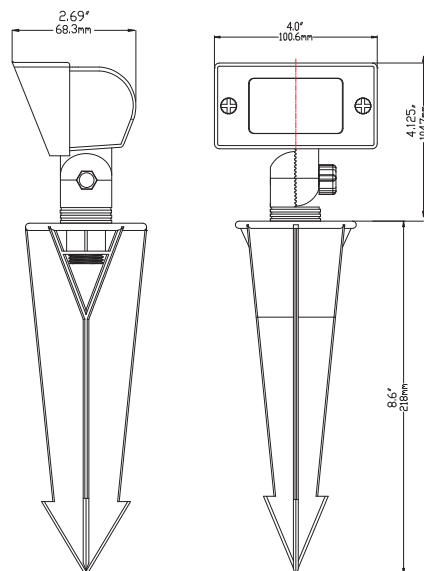

Adjustable Lumen Settings

No pins up: 430 lm (max)	3 pins up: 220 lm
1 pin up: 350 lm	4 or 5 pins up: 100 lm (min)
2 pins up: 290 lm	(Pins located on driver)

SL05 Step Light

Product Features


- Fully integrated, created with high quality LEDs and louvers to reduce glare
- Adjustable lumen output up to 50 lumens with external dial
- Switch from 2700K to 3000K in color temperature
- Flush mount for surface installation
- Mounting screws set to fit into standard junction box
- Includes 15' lead wire



Specifications

Fixture Type: Integrated Low Voltage LED	Wattage: 0.5W - 3.5W	Lead Wire: 15' 18AWG
Color Temperature Settings: 2700K / 3000K	Lumen Output: 5 lm - 50 lm	Mounting: Comes with stainless steel set screws
Material: Marine-Grade, Virgin Brass with a UV Coating	Operating Voltage: 9V - 15V AC	Listing: ETL
Finish: Antique Bronze	Light Source: Seoul LED chips	Standard: UL 2108
	Lens: Frosted Lens	Rating: IP65
	Color Rendering Index: 97+	

Product Drawings

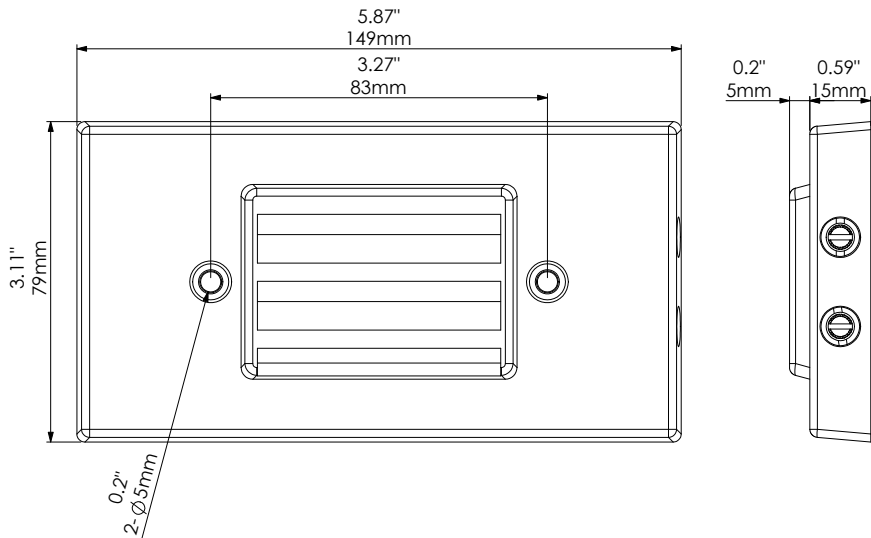

Adjustable Lumen Settings

Setting 1: 5 lm (min)
Setting 2: 20 lm
Setting 3: 35 lm
Setting 4: 50 lm (max)

SL06 Well Light

Product Features

- American designed and manufactured electronics
- Pivoting LED to easily adjust angle of light
- Ultra-durable borosilicate glass lens
- Four interchangeable optics
- Adjustable lumen settings on internal dial
- Patent-pending design
- Pre-construction installation with 4" sleeved PVC pipe



UL1838



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze

Wattage: 0W - 12W

Lumen Output: 0 lm - 1,000 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 25°, 40° (standard), 60°, 80° (no optic)

Color Rendering Index: 97+


Lead Wire: 15' 18AWG

Accessories: Threaded tops (Flange Top, Grill Top, and Grass Ring) sold separately

Listing: ETL

Standard: UL 1838

Product Drawings

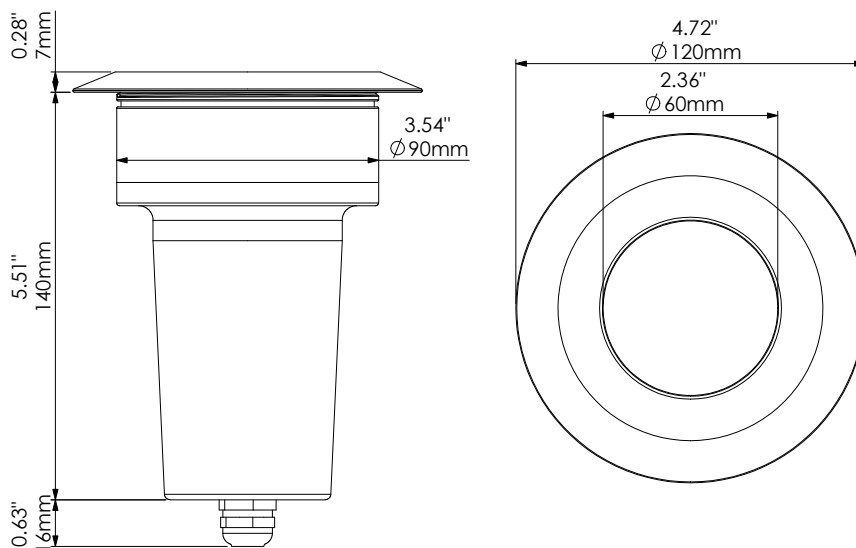

SL07 Path Light

Product Features

- Solid brass construction
- Single source LED chip for greater lux control
- Provides 16' spread of light
- Design complies with IDA guidelines for dark sky preservation
- All components are threaded together, never tack welded, for additional strength
- Hefty 1.5" diameter stem to prevent leaning after installation



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze or Raw Brass

Wattage: 5W

Lumen Output: 210 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Lens: Frosted Diffuser Lens

Color Rendering Index: 92+

TM-30 Rf: 85.6

TM-30 Rg: 99.1

Wire Lead: 10' 18AWG


Mounting: 9" ABS Plastic Stake (included)

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

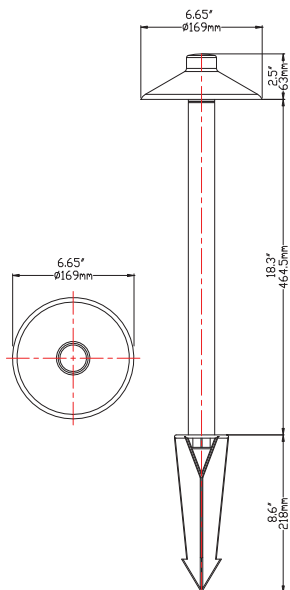

SL07B Bollard Path Light

Product Features

- Solid brass construction and sleek design
- Single source LED chip for greater lux control
- Provides 16' spread of light
- Design complies with IDA guidelines for dark sky preservation
- All components are threaded together, never tack welded, for additional strength
- Hefty 1.5" diameter stem to prevent leaning after installation



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze

Wattage: 5W

Lumen Output: 210 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Lens: Frosted Diffuser Lens

Color Rendering Index: 92+

TM-30 Rf: 85.6

TM-30 Rg: 99.1

Wire Lead: 10' 18AWG


Mounting: 9" ABS Plastic Stake (included)

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

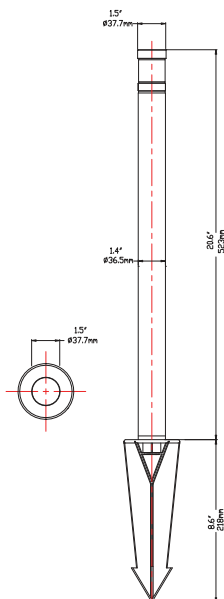

SL07P Pinnacle Path Light

Product Features

- Modern polychromatic design with raw brass embellishment on tip of fixture, designed to naturally patina over time
- Single source LED chip for greater lux control
- Provides 16' spread of light
- Design complies with IDA guidelines for dark sky preservation
- All components are threaded together, never tack welded, for additional strength
- Hefty 1.5" diameter stem to prevent leaning after installation



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze with Raw Brass embellishment

Wattage: 5W

Lumen Output: 210 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Lens: Frosted Diffuser Lens

Color Rendering Index: 92+

TM-30 Rf: 85.6

TM-30 Rg: 99.1

Wire Lead: 10' 18AWG


Mounting: 9" ABS Plastic Stake (included)

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

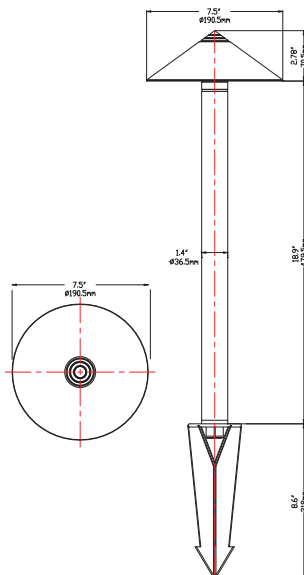

SL09 Underwater Light

Product Features

- Completely sealed and dedicated fixture
- Removable base with stabilizing arms
- Single source LED chip for greater lux control
- IP68 rated
- Corrosion and rust resistant
- Waterproof 18' wire lead



Specifications

Fixture Type: Integrated Low Voltage LED

Color Temperature: 3000K

Material: 316 Stainless Steel & Encased Premium-Grade Acrylic

Wattage: 5W

Lumen Output: 390 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Lens: Crystal Clear Lens

Beam Angle: 95.8 H X 95.8 V

Color Rendering Index: 83+

TM-30 Rf: 82.9

TM-30 Rg: 95.9

Lead Wire: Waterproof 18' 18AWG


Mounting: Removable, 316 stainless steel base

Listing: ETL

Standard: UL 676

Rating: IP68

Product Drawings

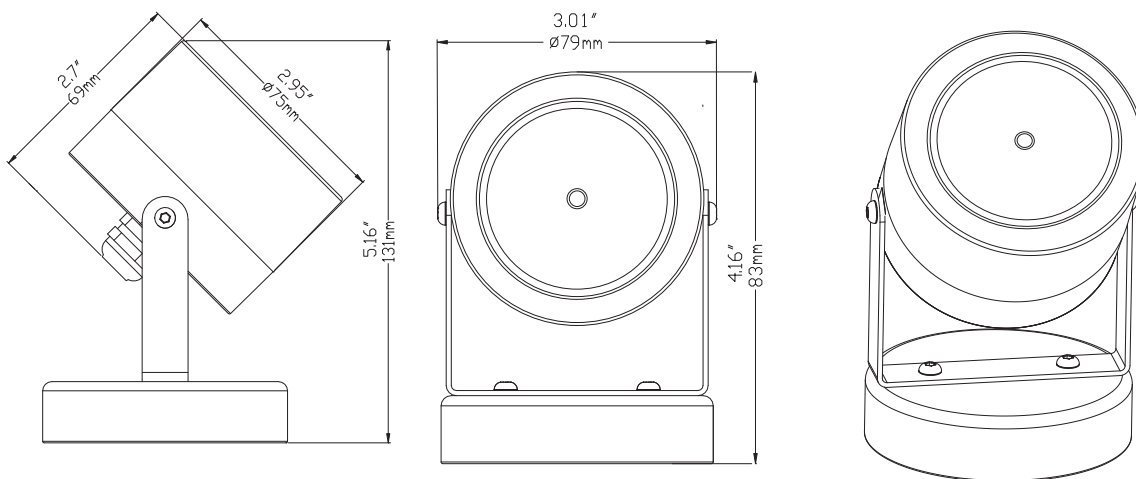

SL11 Archer Light

Product Features

- Single source LED for greater lux control
- Available to order in either low lumen or high lumen output
- Patent-pending, sleek and compact design
- Small fixture virtually disappears into landscape
- Solid, streamlined body with no knuckle or weak point
- Includes the same proven, time-tested LED technology from our SL07 Path Light



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV Coating

Finish: Antique Bronze or Raw Brass

Wattage: 4W or 8W

Lumen Output: 230 lm or 320 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 24°, 40° (standard), 60°, or 80° (no optic)

Color Rendering Index: 97+

TM-30 Rf: 93

TM-30 Rg: 98

Lead Wire: 10' 18AWG

Mounting: 9" ABS Plastic Stake


Accessories: Hex Lens sold separately

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

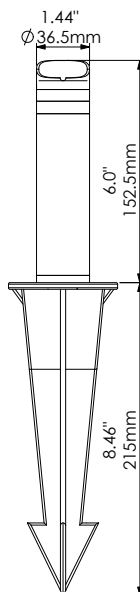

SL12 Hanging Light

Product Features

- Hanging, pendant fixture for downlighting
- Single source LED chip for greater lux control
- Adjustable lumen output
- Patent-pending design
- Frosted lens and hex lens included
- Design complies with IDA guidelines for dark sky preservation



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade Virgin Brass with a UV Coating

Finish: Antique Bronze

Wattage: 0W - 6.3W

Lumen Output: 0 lm - 145 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Lens: Frosted Lens & Hex Lens

Color Rendering Index: 97+

TM-30 Rf: 95

TM-30 Rg: 101

Lead Wire: 15' 18AWG

Mounting: Ring on top of fixture for hanging


Accessories: Optional Gripple® Stainless Steel Cable Hanging Kit sold separately

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

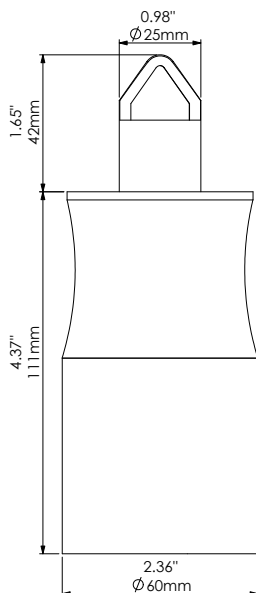

Adjustable Lumen Settings

No pins up: 0 lm (min)	1 pin up: 25 lm
2 pin up: 65 lm	3 pins up: 95 lm
4 pins up: 125 lm	5 pins up: 145 lm (max)

SL13 Dock Light

Product Features

- Marker light for docks, decks, boardwalks, hardscapes, and driveways
- Surface mount fixture
- Dome-shaped, patent-pending design
- Solid construction, extremely durable
- 360° coverage with 3 beams
- Single source LED chip for greater lux control



Specifications

Fixture Type: Integrated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze or Nickel

Wattage: 4.5W

Lumen Output: 35 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Color Rendering Index: 97+

Lead Wire: 10' 18AWG

Mounting: Comes with 2 screws for


surface installation

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

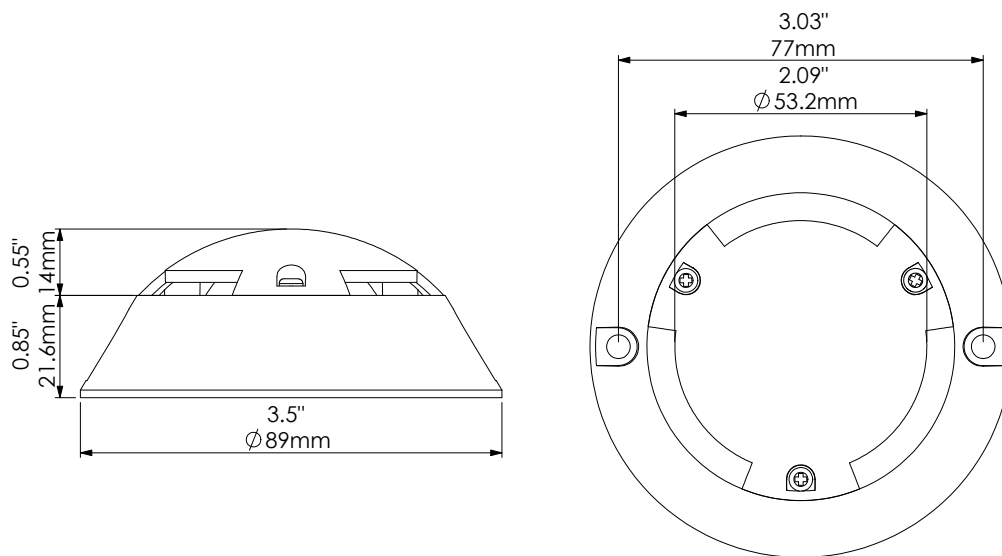

SL16 Well Light

Product Features


- Mid-sized well light
- Adjustable lumen settings on driver
- Single LED chip for greater lux control
- Four interchangeable optic options
- Ultra-durable, frosted glass lens
- Built-in, internal hex lens
- Pre-construction installation with 2" sleeved PVC pipe



Specifications

Fixture Type: Dedicated Low Voltage LED	Lumen Output: 100lm-400lm	Color Rendering Index: 97+
Color Temperature: 2700K / 3000K	Operating Voltage: 9V - 15V AC	Lead Wire: 15' 18AWG
Material: Marine-Grade, Virgin Brass	Light Source: CREE LED	Accessories: Comes standard with Flange Top. Cup Top and Grass Ring sold separately.
Finish: Antique Bronze with UV Coating	Optics: 24°, 40° (standard), 60°, 80° (no optic)	
Wattage: 1.3W - 8W		

Product Drawings

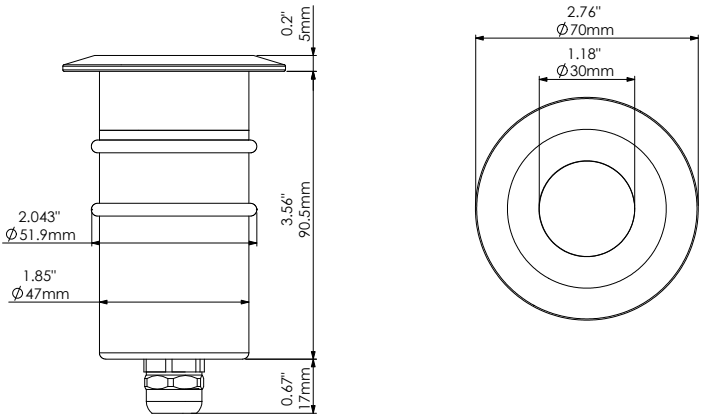

Adjustable Lumen Settings

Pins located on driver

No pins up: 400 lm (max)	2 Pins Up: 200 lm
1 Pin Up: 300 lm	3 Pins Up: 100 lm (min)

SL17 Railey Light

Product Features

- Integrated low profile area light
- Patented, sleek design
- Compact size with even light distribution
- Sturdy mounting with 7 inch stainless steel spikes
- The head pivots 15° to reduce glare adjust angle of light
- Design complies with IDA guidelines for dark sky preservation



Specifications

Fixture Type: Integrated

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze

Wattage: 1W

Lumen Output: 60 lm

Operating Voltage: 9V - 15V AC

Light Source: Seoul LED Chips

Lens: Frosted Lens

Color Rendering Index: 83+

TM-30 Rf: 84

TM-30 Rg: 95.9

Lead Wire: 15' 18AWG


Mounting: Set of two 7" Stainless Steel Spikes

Listing: ETL

Standard: UL 1838

Rating: IP67

Product Drawings

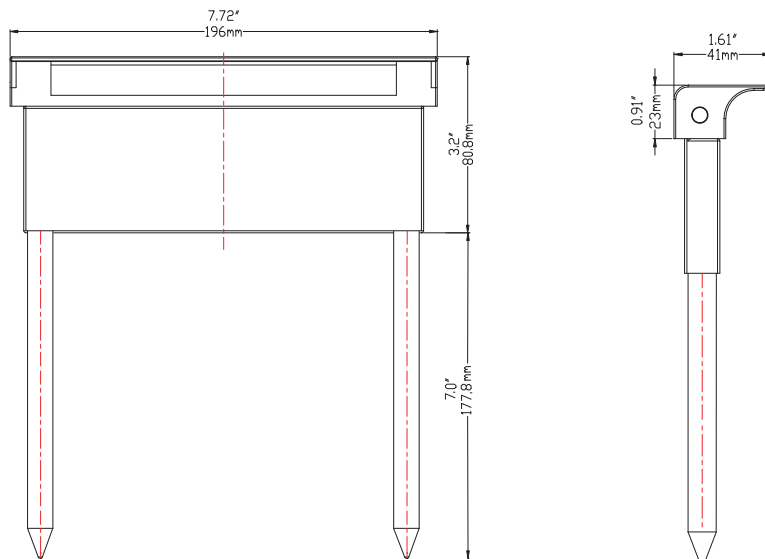

SL21 Up Light

Product Features

- Heavy, all brass, solid construction with 9-inch brass stake included
- Adjustable lumen output with internal dial
- American designed and manufactured electronics
- Single source LED chip for greater lux control
- Enhanced strength from through bolt in the knuckle
- Comes standard with Hex lens to reduce glare



UL1838



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze

Wattage: 0W - 12W

Lumen Output: 0 lm - 1,000 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 25°, 40° (standard), 60°, 80° (no optic)

Lens: Hex Lens

Color Rendering Index: 97+


Lead Wire: 10' 18AWG

Mounting: 9-inch Brass Stake

Listing: ETL

Standard: UL 1838

Product Drawings

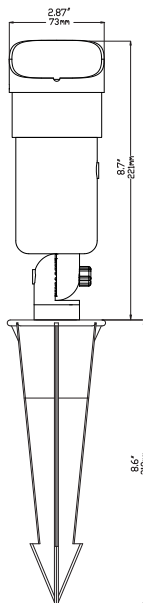

SL23 Down Light

Product Features

- 50' lead wire
- Glare guard shield with hex louver lens for optimal glare control
- Enhanced strength from through bolt in the knuckle
- American designed and manufactured electronics
- Two hole mount with double locking mechanism to make sure it never shifts.
- Tree mount and stainless steel off-set bolts included
- Drill driver bit for hanger bolts available



UL1838



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K / 5000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze

Wattage: 0W - 12W

Lumen Output: 0 lm - 805 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 18°, 40° (standard), 60°, 80° (no optic)

Lens: Hex Lens

Color Rendering Index: 92+


Lead Wire: 50' 18AWG

Mounting: Two hole tree bracket including hardware

Listing: ETL

Standard: UL1838

Product Drawings

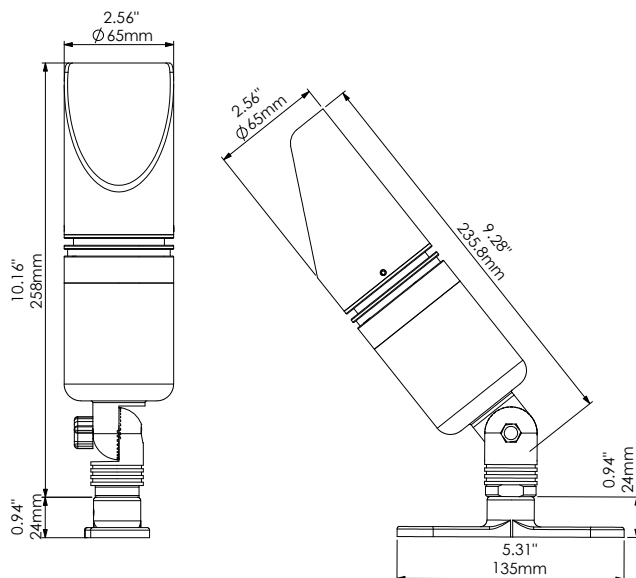

SL31 Mini Up Light

Product Features

- Miniature, patented design
- Adjustable lumen output with internal dial
- American designed and manufactured electronics
- Single source LED chip for greater lux control
- Enhanced strength from through bolt in the knuckle
- Comes standard with Hex lens to reduce glare
- Ideal for second story architectural applications



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade Virgin Brass with a UV coating

Finish: Antique Bronze

Wattage: 0W - 4W

Lumen Output: 0 lm - 275 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 24°, 40° (standard), 60°, 80° (no optic)

Color Rendering Index: 97+

Wire Lead: 15' 18AWG


Mounting: 9" ABS Plastic Stake (included)

Listing: ETL

Standard: UL 1838

Rating: IP65

Product Drawings

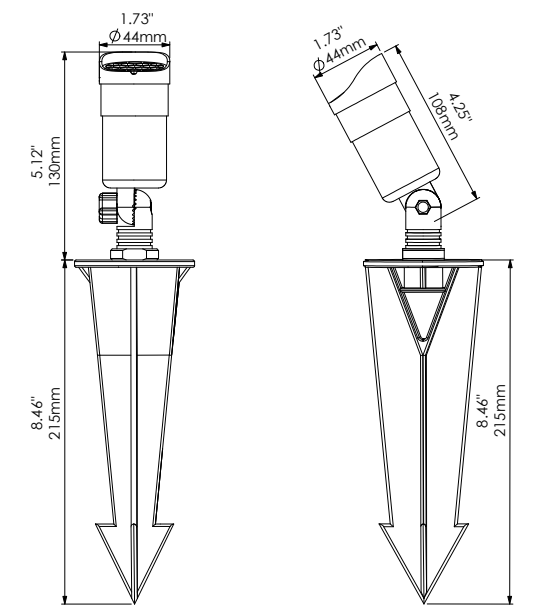

SL33 Mini Down Light

Product Features

- Miniature, patent-pending design
- 30' lead wire
- Glare guard shield with hex louver lens for optimal glare control
- Enhanced strength from through bolt in the knuckle
- American designed and manufactured electronics
- Two hole mount with double locking mechanism to make sure it never shifts.
- Tree mount and stainless steel off-set bolts included
- Drill driver bit for hanger bolts available



Specifications

Fixture Type: Dedicated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze

Wattage: 0W - 4W

Lumen Output: 0 lm - 150 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Color Rendering Index: 90+

Lead Wire: 30' 18AWG


Mounting: Two hole tree bracket including hardware

Listing: ETL

Standard: UL1838

Rating: IP65

Product Drawings

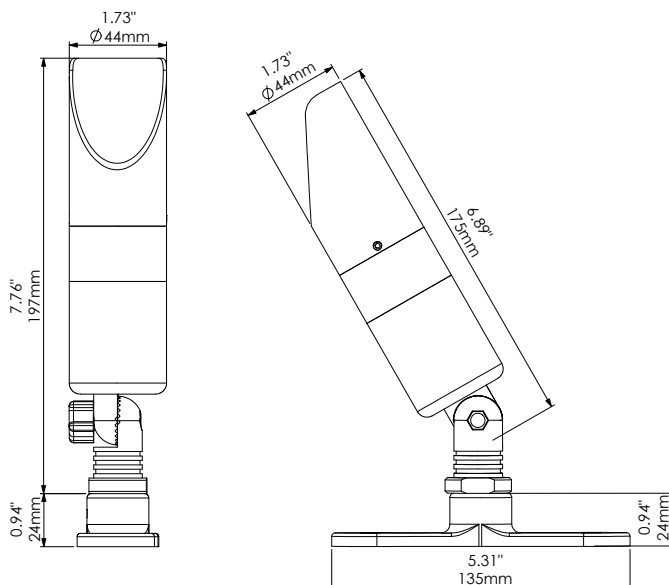

SL36 Mini Well Light

Product Features

- Miniature, patent-pending design
- Single source LED chip for greater lux control
- Solid brass construction and slim, compact design
- Pre-construction installation with 1.25" sleeved PVC pipe
- Can be installed with our 1.5" diameter extension riser for a raised mini well light
- Optional tops including dome, cup, square, two-hole, and surface mount
- Durable and sleek, designed specifically for hardscape projects



Specifications

Fixture Type: Integrated Low Voltage LED

Color Temperature: 2700K / 3000K

Material: Marine-Grade, Virgin Brass with a UV coating

Finish: Antique Bronze or Nickel

Wattage: 1.6W

Lumen Output: 100 lm

Operating Voltage: 9V - 15V AC

Light Source: CREE LED

Optics: 30°

Color Rendering Index: 94+

Lead Wire: 15' 18AWG


Mounting: Can be installed with our 1.5" diameter extension riser for a raised mini well light

Listing: ETL

Standard: UL 1838



Rating: IP65

Product Drawings

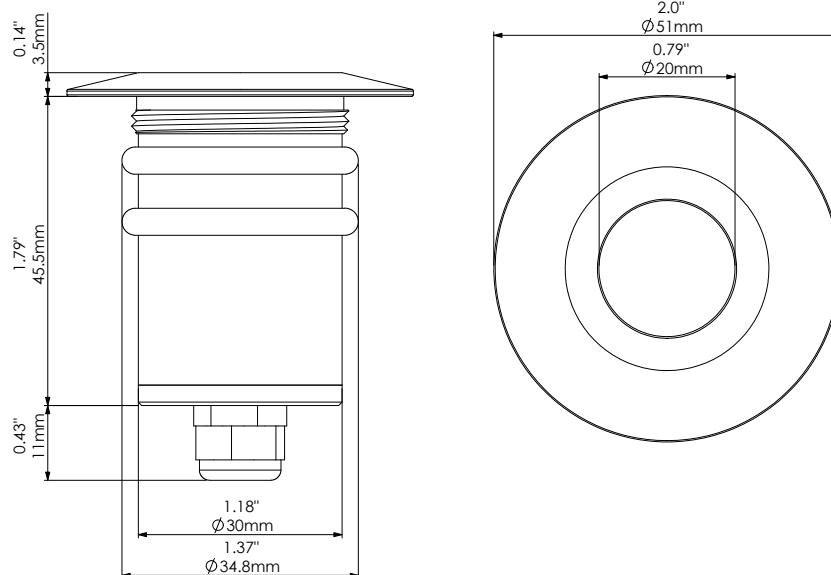


AL1 • Barletta

ClaroLux's® Patented **ALI** area lights offer a uniform light output and feature an easy to remove, screw on top for quick lamp replacement. The fixture provides sufficient light to cast soft glows on any path or walking area. These luminaires are ideal for walkways and planter beds.

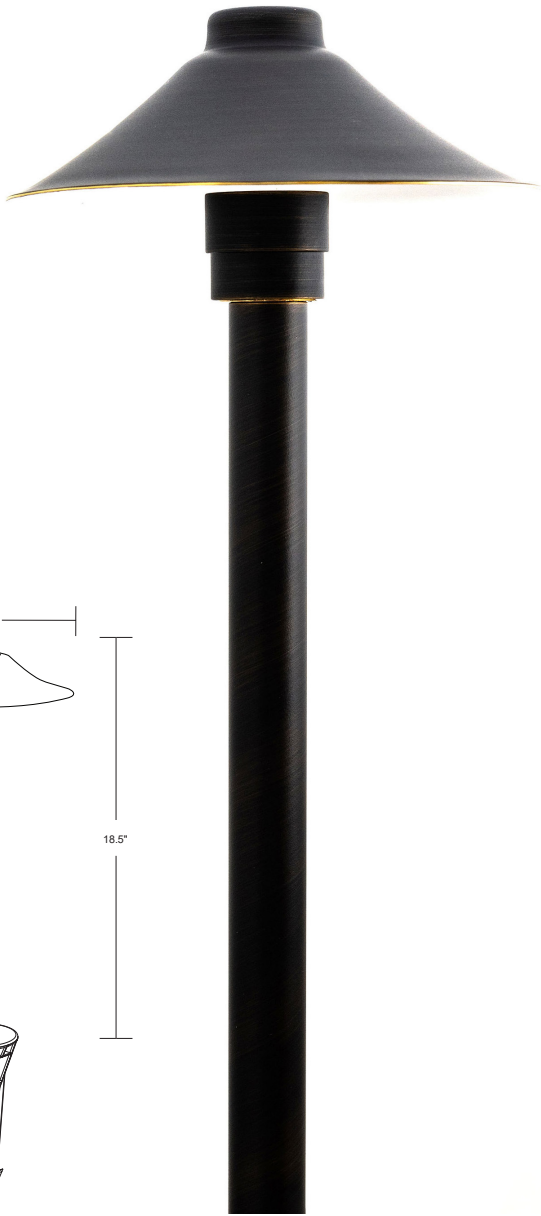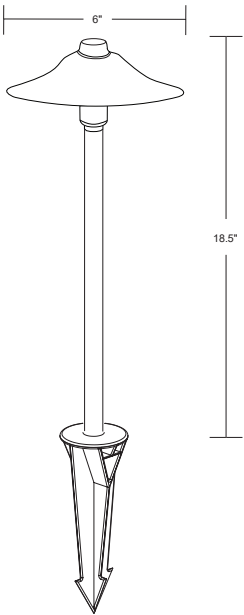

AVAILABLE FINISHES:


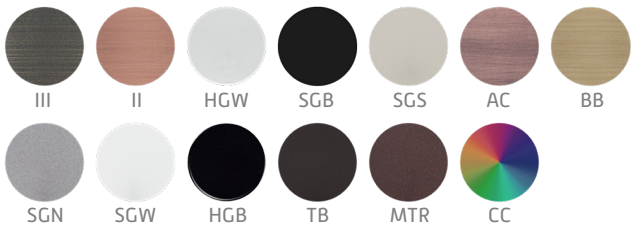


AL8 • Tuscany

ClaroLux's® **AL8** is the newest edition to our line of area & path lights. It's sleek, contemporary appearance and small size allows this fixture to be easily tucked away or blended seamlessly into any landscape design.



AVAILABLE FINISHES:

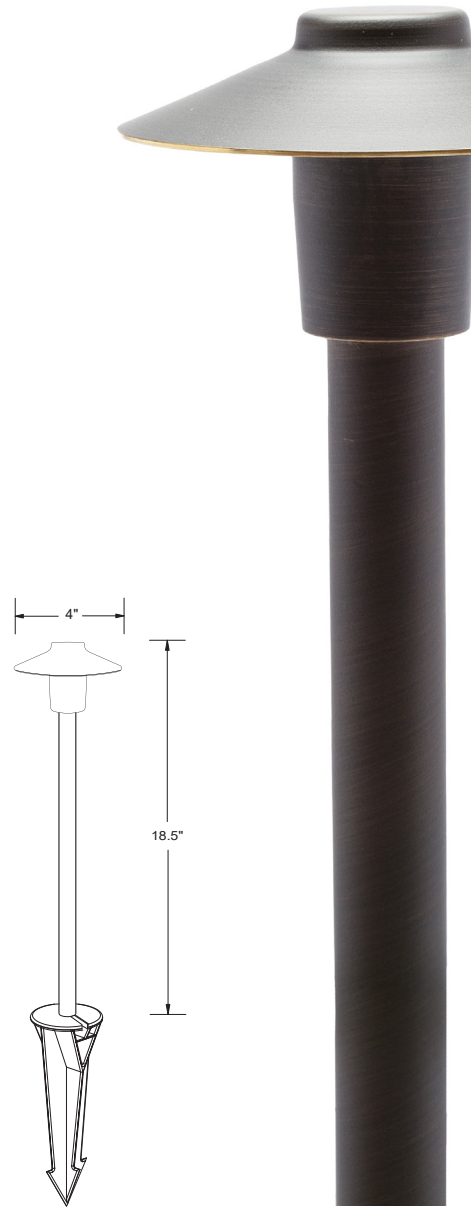
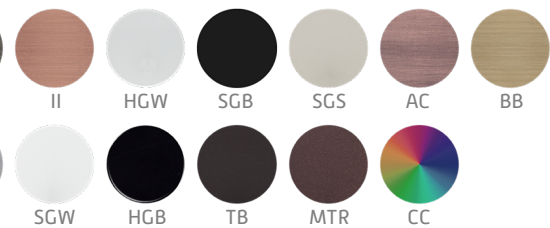


AL9 • Oxford

ClaroLux's® **AL9** is a petite yet distinctive luminaire that offers soft low-level lighting. The fixture provides sufficient light to cast soft glows on any path or walking area. These luminaires are ideal for walkways and planter beds.




AVAILABLE FINISHES:

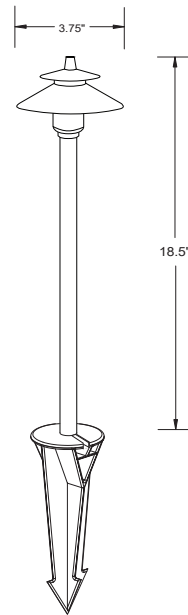
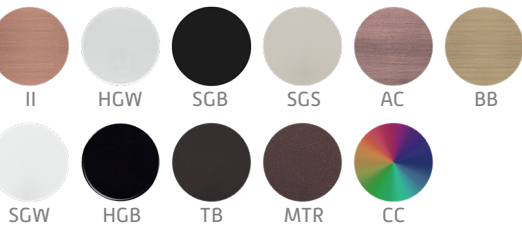


AL10 • Monaco

ClaroLux's® **AL10** area light, our largest fixture in the line, is an elegant fixture that offers soft low-level lighting. The AL10 provides sufficient light to cast soft glows on any path or walking area. These luminaires are ideal for walkways and planter beds.

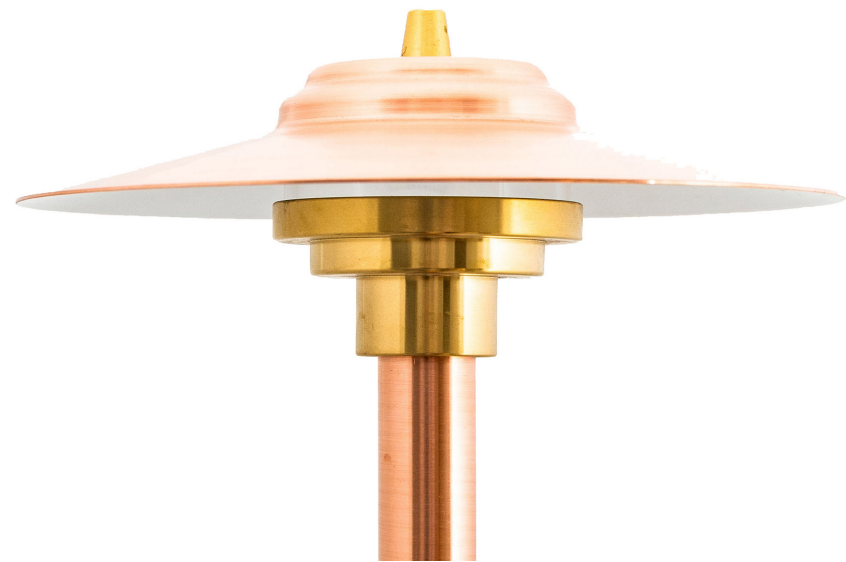

BLE FINISHES:

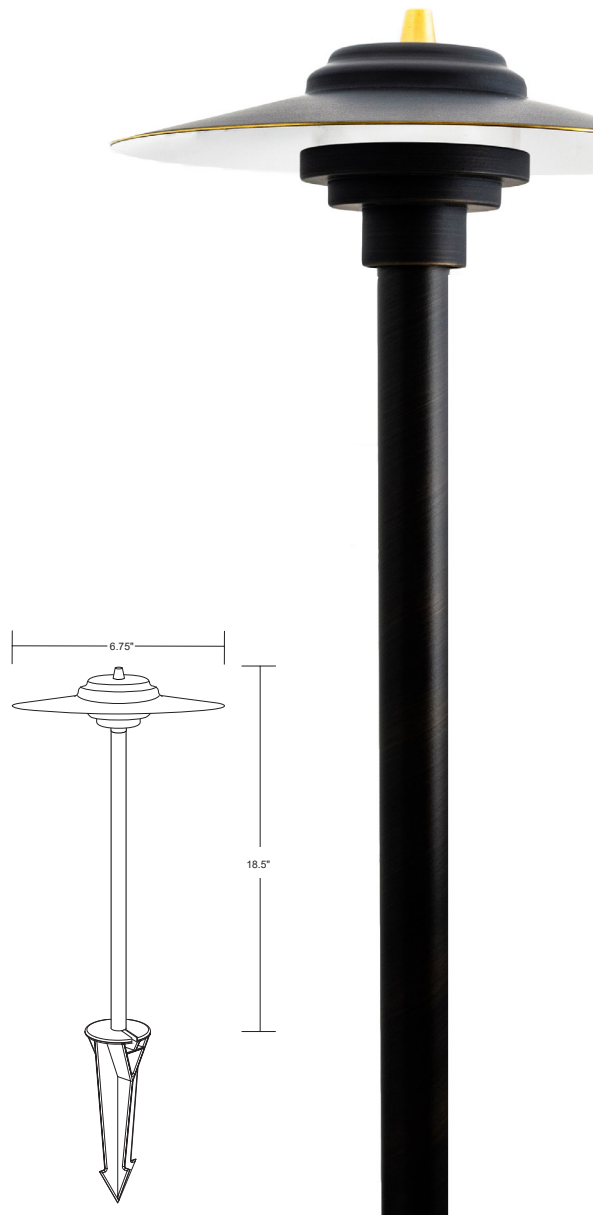
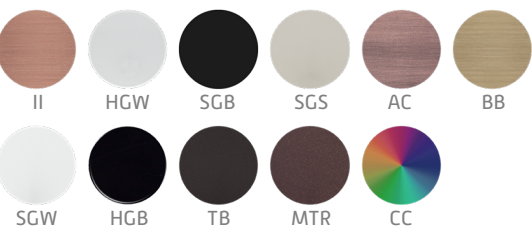


AL11 • Verona

A smaller version of the AL1, ClaroLux's® Patented **AL11** is one of the top selling luminaires in its class. The AL11 area light offers the same uniform light output and features an easy to remove screw on top for quick lamp replacement. The fixture provides sufficient light to cast soft glows on any path or walking area. These luminaires are ideal for walkways and planter beds.



AVAILABLE FINISHES:

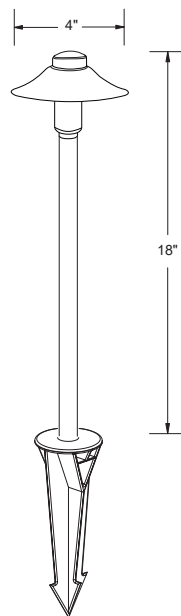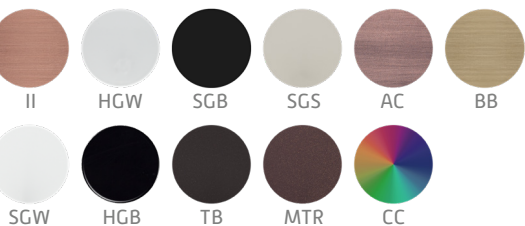


AL12 • San Marino

The **AL12** is one of ClaroLux's® more popular area & path lights. The AL12 area lights offer a uniform light output and feature an easy to remove, screw on top for quick lamp replacement. These luminaires are ideal for walkways and planter beds, providing sufficient light to cast soft glows on any path or walking area.




AVAILABLE FINISHES:


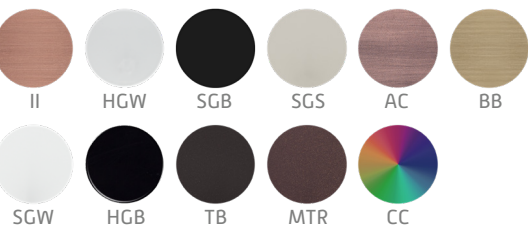


AL-BL11 • Lenoir

Add a touch of light to your outdoor patio, driveway or walkway with ClaroLux's® **AL-BL11** MR11 area & path Lights. The "Lenoir" area & path Light is the perfect luminaire for lighting driveways, walkways, and other areas where traditional area light fixtures are not suitable.

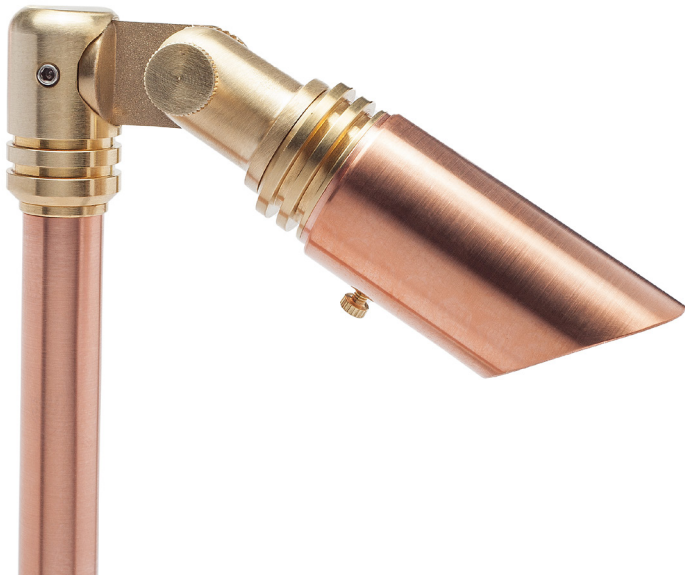


AVAILABLE FINISHES:

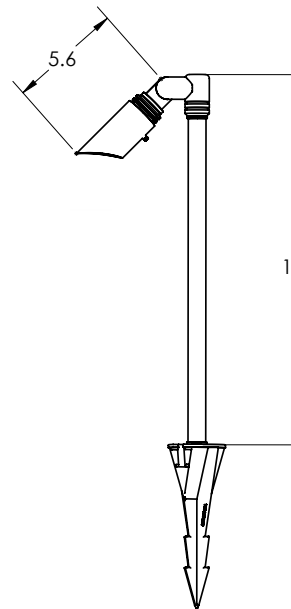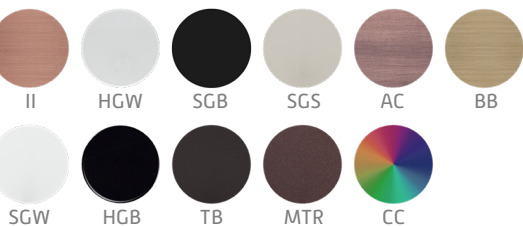


AL-WFL26 • Clayton

A petite, modern area & path light that offers soft low-level lighting, ClaroLux's® Patented **AL-WFL26** luminaires provide sufficient light to cast soft glows on any path or walking area. These luminaires are ideal for walkways and planter beds. The AL-WFL26 comes standard with a 24" riser and is also available with custom size risers. Please call for details.


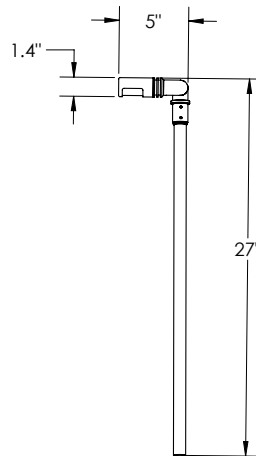


AVAILABLE FINISHES:

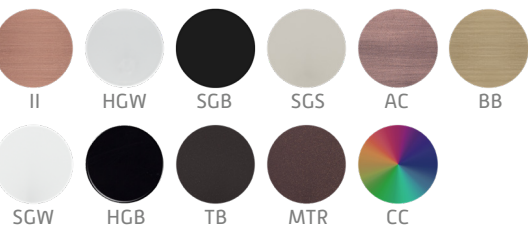


BL11 • Alexander

ClaroLux's® **BL11** mini bullet light is a powerful fixture ideal for up-lighting and wash-lighting (with a 120° LED LAMP), featuring an 2" adjustable shroud that can be raised or lowered to reduce glare. Great for illuminating small Japanese Maples, short retaining walls, step landings, small statues, mailboxes, and small landscape accents. The lamp rests flush against the glass for accurate beam angle rendition.

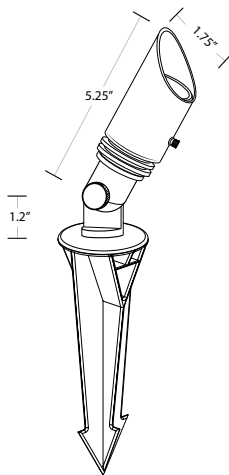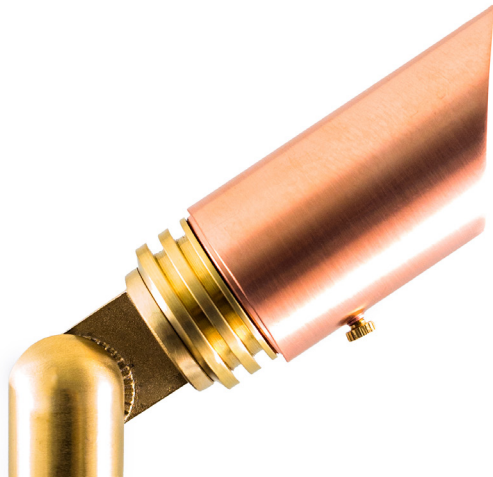

AVAILABLE FINISHES:


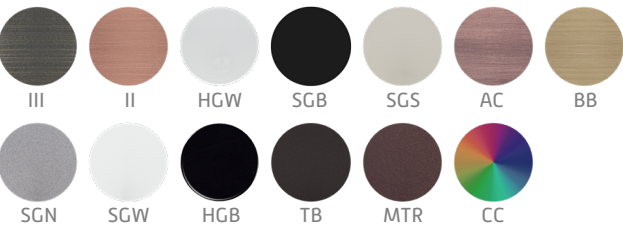


BL21 • Tivoli

ClaroLux's® **BL21** compact bullet light is the little brother to ClaroLux's® BL23, with a low-profile base and shorter visor (1" of adjustability) to eliminate glare. Ideal for up-lighting and wash-lighting (with a 120° LED LAMP), featuring a traditional spring-loaded socket that ensures the lamp rests flush against the glass for accurate beam angle rendition.



BLE FINISHES:

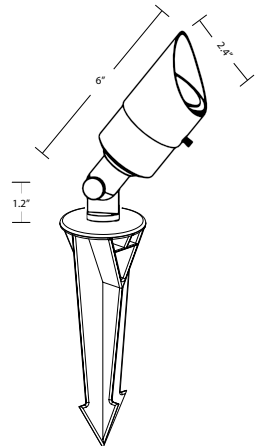
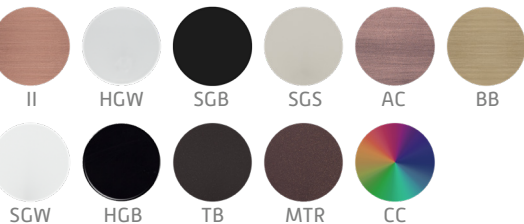


BL23 • Ravenna

ClaroLux's® Patented **BL23** bullet light is THE BEST DIRECTIONAL SPOT LIGHT IN THE INDUSTRY. Ideal for up-lighting and wash-lighting (with a 120° LED LAMP), featuring an industry leading 2.5" adjustable shroud that can be raised or lowered to reduce glare. The patented body houses a stationary ADJUSTABLE HEIGHT MR-16 socket with stainless steel clips. The lamp rests flush against the glass for accurate beam angle rendition. However, the socket can be easily lowered by removing spacers to allow room for lenses or louvers.




AVAILABLE FINISHES:

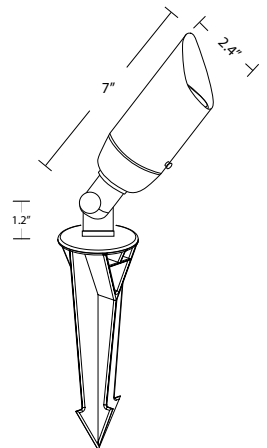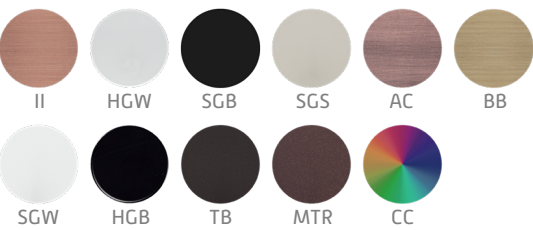


FL36 • Lawndale

ClaroLux's® **FL36** brass LED directional up-light is the perfect luminaire for illuminating large trees, tall structures and vast spaces. The removable shroud secures the PAR36 lamp for quick installation. The FL36 Lawndale fixture is also ideal for commercial spaces that need a robust, heavy duty, cast-brass luminaire.


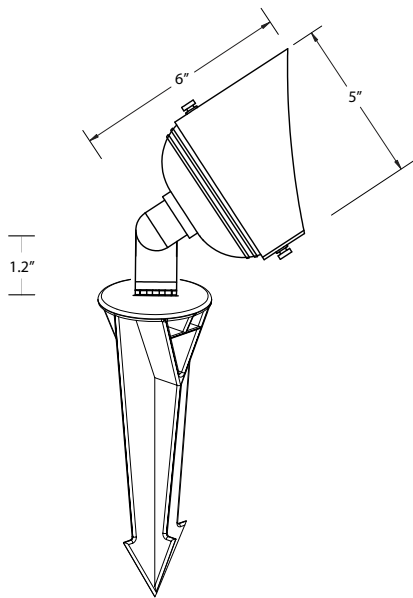


AVAILABLE FINISHES:

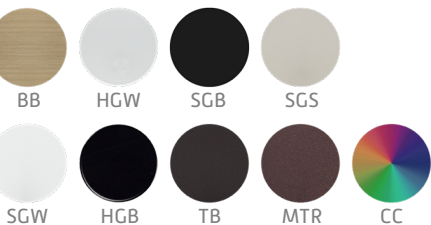


WFL26 • Charlotte

ClaroLux's® **WFL26** luminaires are petite yet powerful Wash Lights that are ideal for illuminating planter areas, short retaining walls (up to 7ft tall), step landings, under eaves, or accenting dormers. Comes with a Telescoping Visor with 1" of adjustability to reduce glare. Options Include: 7" extension visor if the standard 3" visor is not long enough to prevent glare.

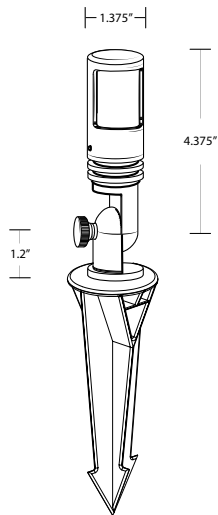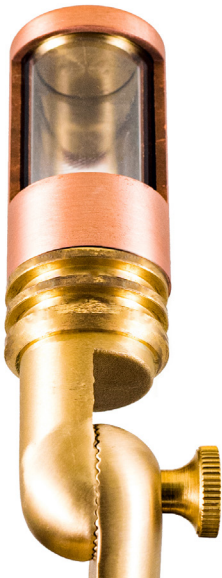

AVAILABLE FINISHES:

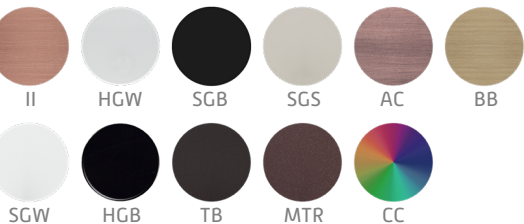


*Shown with optional access

HL11 • Aries


ClaroLux's® new **HL11** Aries mini pendant provides a beautiful moonlighting effect when hung from trees, trellises and outdoor dining spaces. Though made of copper or brass and fully enclosed water tight CNC, due to it's form factor it is an exceptionally light weight fixture that is highly versatile.



* Shown with optional acc

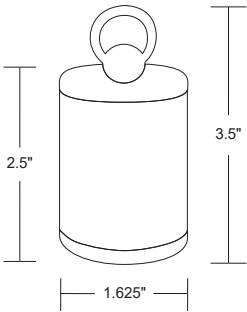

AVAILABLE FINISHES:


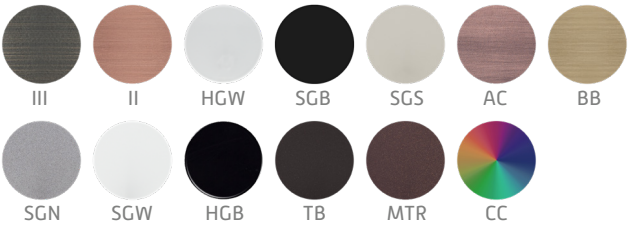


HL16 • Luna

ClaroLux's® newest **HL16** Luna pendant provides a beautiful moonlighting effect when hung from larger trees, gazebos, pergolas and outdoor entertainment areas. The optional visor provides a concentrated light source that makes the Luna an invaluable addition to your outdoor landscape lighting design.




AVAILABLE FINISHES:

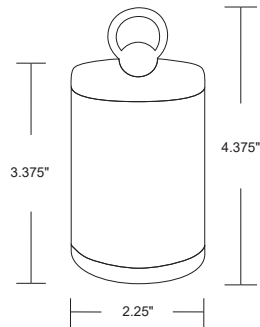
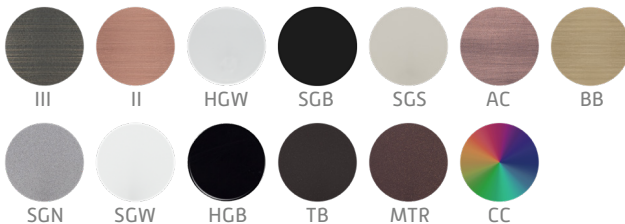


TL11 • Pelham

ClaroLux's® **TL11** Pelham mini down light is great for moonlighting walkways, flowerbeds, grassy lawns, and other landscaping where area lights are not suitable. Due to it's small size, it's great for under eave lighting and downlighting from soffit. It features a swivel U-bracket that allows 180-degree rotation. The lamp rests flush against the glass for accurate beam angle rendition.

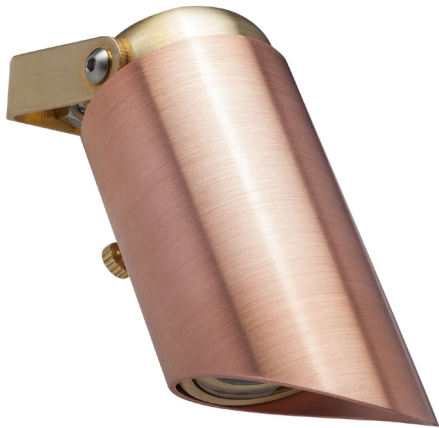

AVAILABLE FINISHES:

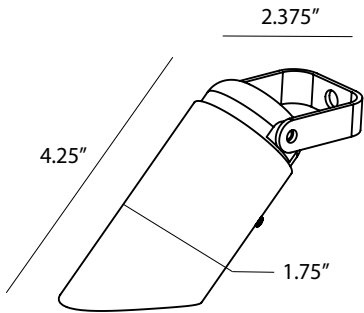
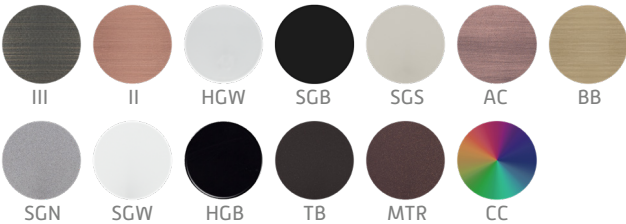


TL16 • Lattimore

ClaroLux's® **TL16** Lattimore down light is great for moonlighting walkways, flowerbeds, grassy lawns, and other landscaping where area lights are not suitable. It features a swivel U-bracket that allows 180-degree rotation. The lamp rests flush against the glass for accurate beam angle rendition. However, the socket can be easily lowered by removing spacers to allow room for lenses or louvers.




AVAILABLE FINISHES:

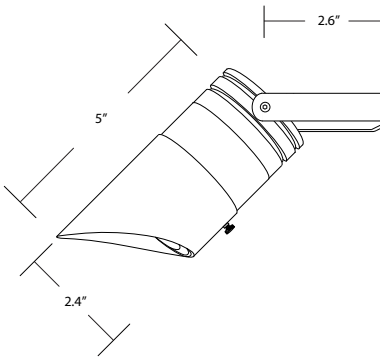
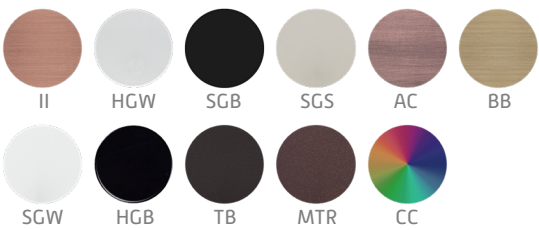


TL24 • Venice

ClaroLux's® **TL24** Venice tree lights are great for downlighting walkways, flowerbeds, grassy lawns, and other landscaping where area lights are not suitable. The TL24 Tree Light is designed with an adjustable extension shroud that eliminates glare and provides a soft moonlighting effect.

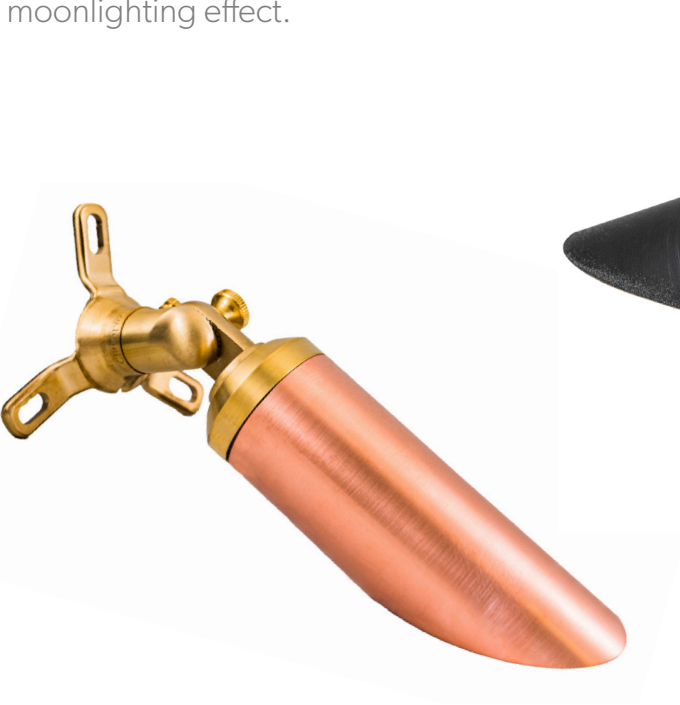


AVAILABLE FINISHES:

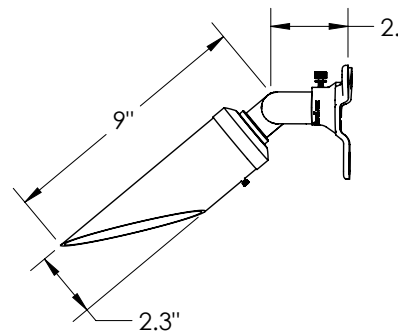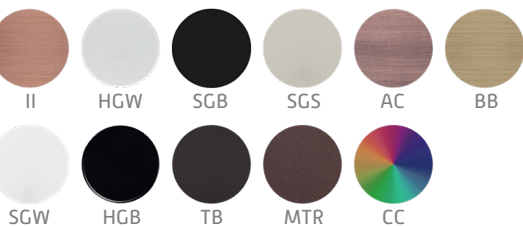

WL3 • Belmont

ClaroLux's® **WL3** Belmont PAR36 in-ground well light is great for up-lighting trees, flags, facades, garages, and much more! PAR36 Lamps provide maximum lumen output for residential and commercial projects.

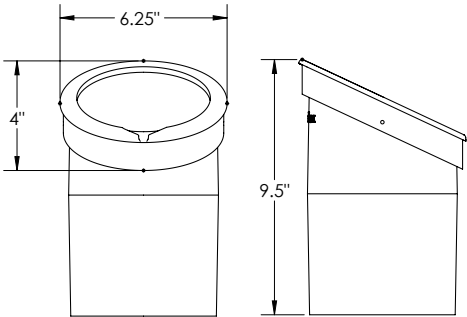


AVAILABLE FINISHES:



ABS

WL4 • Clemmons

ClaroLux's® **WL4** Clemmons PAR36 in-ground well light is great for uplighting trees, flags, facades, garages, and much more! PAR36 Lamps provide maximum lumen output for residential and commercial projects.

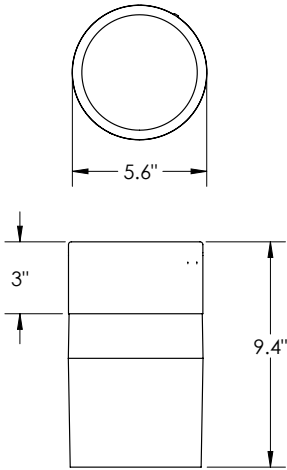


AVAILABLE FINISHES:




II

WL6 • Leland

ClaroLux's® **WL6** Leland PAR36 in-ground well light is great for uplighting trees, flags, facades, garages, and much more! PAR36 Lamps provide maximum lumen output for residential and commercial projects.

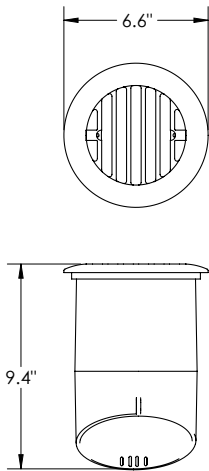


AVAILABLE FINISHES:

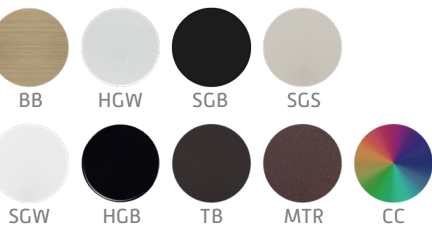


WL16-FT • Starmount

ClaroLux's® **WL16-FT** Starmount MR16 in-ground well light is great for uplighting trees, flags, facades, garages, and much more! The Starmount is designed for installing in concrete, or landscape beds.


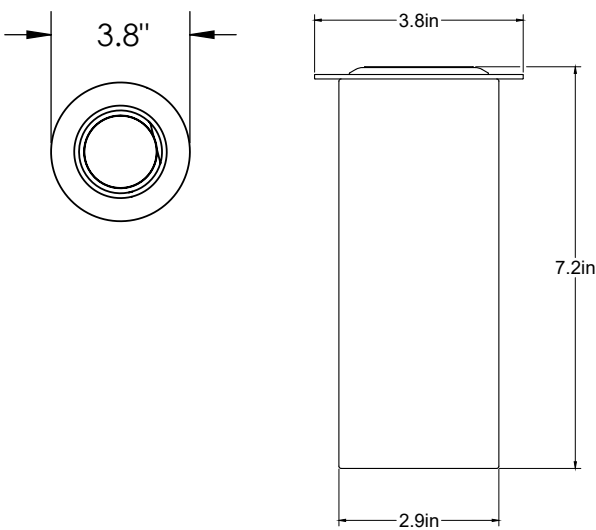


BLE FINISHES:

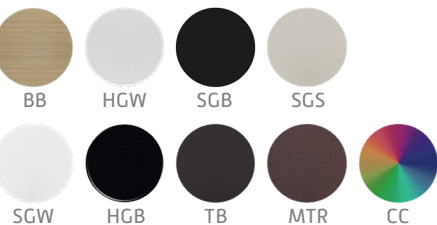


WL16-RS • Cotswold

ClaroLux's® **WL16-RS** Cotswold MR16 in-ground well light is great for uplighting trees, flags, facades, garages, and much more! The Starmount is designed for installing in concrete, or landscape beds.





BLE FINISHES:

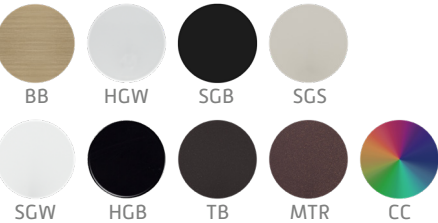


DL4 • Turin

ClaroLux's® **DL4** Turin hardscape lights are perfect for illuminating stairs, benches, decks, docks, retaining walls, and other niche locations. These luminaires are perfect for placing underneath the capstone of a retaining wall or sitting wall. The frosted glass creates a soft and elegant lighting effect. With its small profile, the DL4 can easily be tucked away in many areas providing an inconspicuous lighting effect.

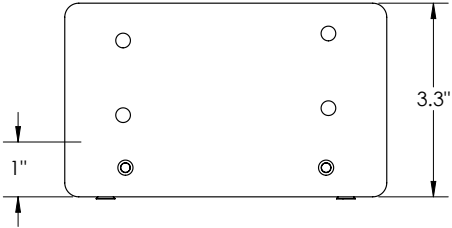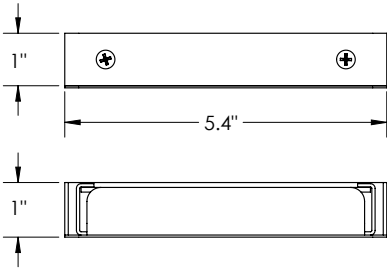

AVAILABLE FINISHES:


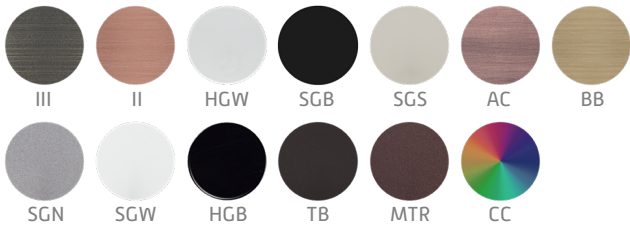


DL6 • Raleigh


The ClaroLux® **DL6** Raleigh deck light's narrow profile and rectangular shape is ideal for niche areas such aluminum fence posts or lanai railings. This luminaire was designed for illuminating decks, docks and patio areas. The cover is removable for easy socket access and simple lamp replacement.



AVAILABLE FINISHES:

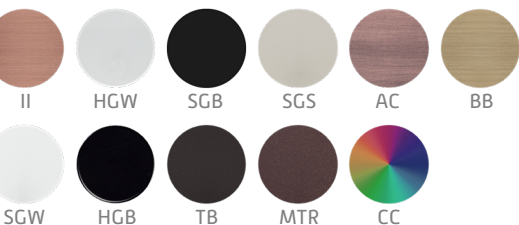

Universal Mounting Bracket


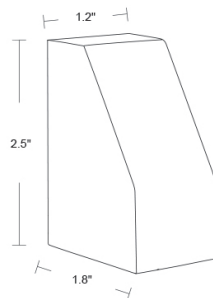


DL7 • Sylva


The ClaroLux® **DL7** Sylva deck light's narrow profile and cylinder shape is ideal for niche areas such aluminum fence posts or lanai railings. This luminaire was designed for illuminating decks, docks and patio areas. The cover is removable for easy socket access and simple lamp replacement.



AVAILABLE FINISHES:

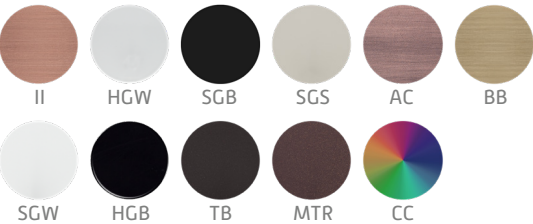

Universal Mounting Bracket


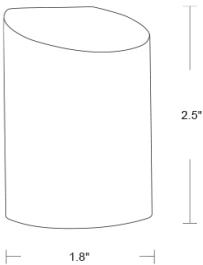


DL8 • Bellaria


The ClaroLux® **DL8** Bellaria deck light is ideal for installing on wide posts. It's bell shaped profile provides a large, soft spread of light for illuminating larger decks, docks and patio areas. The cover is removable for easy socket access and simple lamp replacement.



AVAILABLE FINISHES:

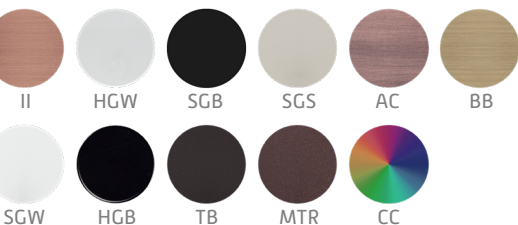

Universal Mounting Bracket


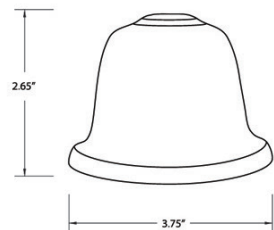


DL9 • Ancona


The ClaroLux® **DL9** Ancona deck light is ideal for installing on wide posts. It's pyramid shaped profile provides a large, soft spread of light for illuminating larger decks, docks and patio areas. The cover is removable for easy socket access and simple lamp replacement.



AVAILABLE FINISHES:

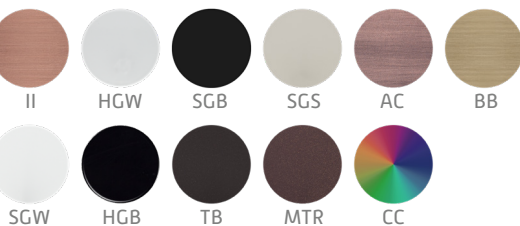

Universal Mounting Bracket


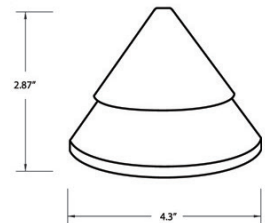


DL10 • Charleston


The ClaroLux® **DL10** Charleston deck light is ideal for installing on wide posts. It's conical shaped profile provides a large, soft spread of light for illuminating larger decks, docks and patio areas. The cover is removable for easy socket access and simple lamp replacement.



AVAILABLE FINISHES:

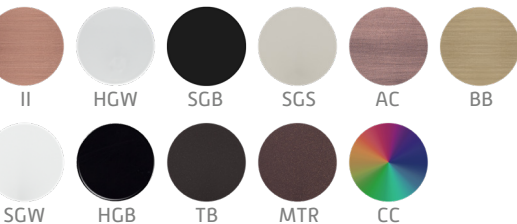

Universal Mounting Bracket


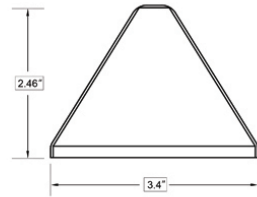


DL20 • Crescent

The highly durable ClaroLux® **DL20** Crescent deck light, with it's small, unique shaped body is designed to fit within custom niches on decks, docks and patio areas. This luminaire is fully enclosed with a frosted glass lens that emits a beautifully diffused light while sitting at a slight angle to maximize light dispersion.





BLE FINISHES:

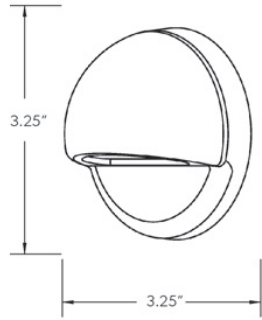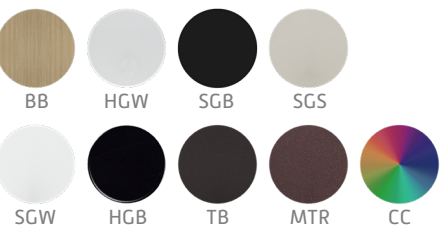


SWL1 • Fasano

ClaroLux's® **SWL1-III** Fasano specialty wash light is perfect for illuminating driveways and pathways where traditional path lights cannot be used. This patented specialty luminaire is constructed from solid cast brass enabling it to be placed where most conventional area lights would be destroyed. This discrete yet powerful fixture can illuminate ground areas, but can also be surface mounted on docks, decks, rock walls, etc.

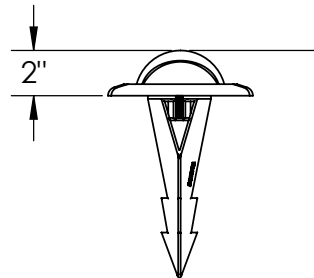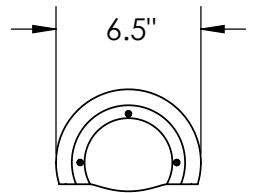


AVAILABLE FINISHES:

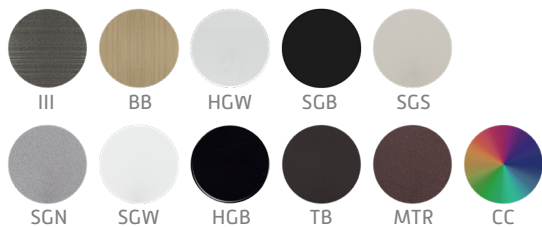


WFLJ5 • Johnny Five

The ClaroLux® **WFLJ5** Johnny Five luminaire is THE MOST VERSATILE LUMINAIRE IN THE LANDSCAPE LIGHTING INDUSTRY!!! It's short, but stout and is perfect for a multitude of applications including downlighting, wall washing, illuminating flag poles, lighting signs and washing bushes.

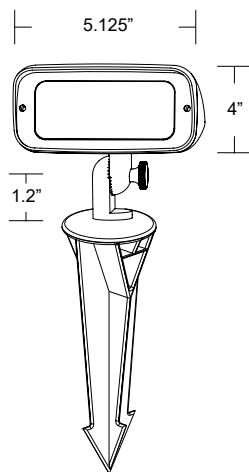


AVAILABLE FINISHES:

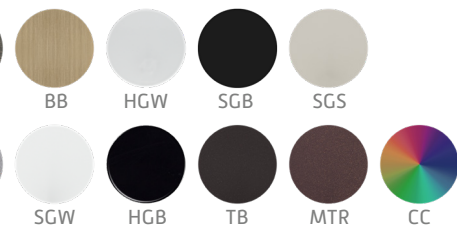

GL11-V • Lexington

ClaroLux's® **GL16-V** Lexington is made of durable solid stainless steel construction, has a convenient push button on/off switch and is surface mountable, making it ideal for grills, cook tops and summer kitchens. It's flexible goose neck design allows for easy positioning for precise illumination.

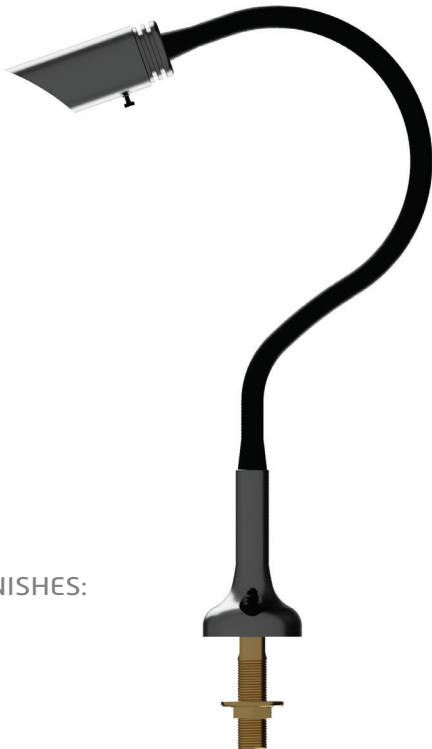

ARD FINISHES:



SC




UL3-V • Columbus

The ClaroLux® **UL3-V** Columbus Underwater Light is great for illuminating small water fountains, waterfalls, ponds and other water features. It's solid stainless steel construction and silicone seals allow it to be submerged to up 1 meter or 3 feet deep.

Features:

- Solid 316 Stainless Steel Construction
- Silicone Seals
- Pre-Greased Copper Beryllium Socket
- Submersible Up to 1m or 3ft
- Swivel Bracket with 180° Rotation
- 25FT 16AWG SJOOW Cord

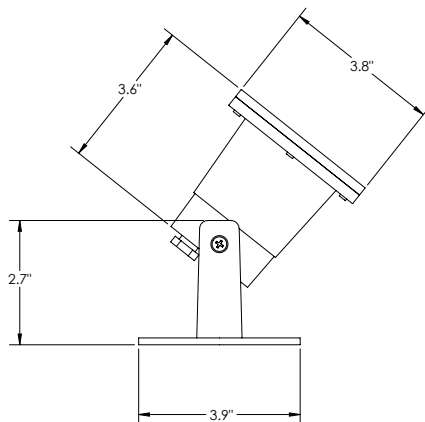

BLE FINISHES:







V3 | Visionary Series Spotlight

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

The Visionary 3 Spotlight is sleek at only 2.25 inches in diameter and is built with a light engine that can be upgraded to future technology. With its vertical heat sink, this fixture provides higher thermal conductivity and allows for improved performance, efficiency and lumen output.

PRODUCT DIMENSIONS & BEAM SPREADS

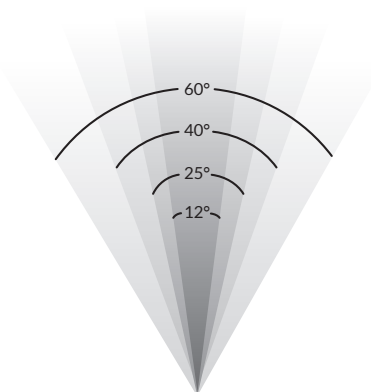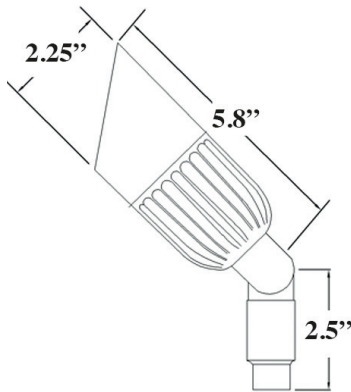

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Compression fit lens.
- Breathable ant guard to eliminate insect infestation.
- Double silicone o-ring gaskets for a tight-fitting shroud.
- Vertical heat sink that provides higher thermal conductivity.
- Field serviceable and upgradeable LED board.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Clear flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	190LM
	4W	7VA	330LM
	6W	10VA	460LM
	9W	15VA	660LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red** ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com





V2 | Visionary Series Spotlight

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

The Visionary 2 Spotlight is Garden Light LED's #1 selling light for a reason. It sets the standard for high-quality, integrated LED landscape lighting at a very competitive price. Created with a horizontal heat sink that disperses excess heat away from the LEDs, this fixture is meant to last a lifetime.

PRODUCT DIMENSIONS & BEAM SPREADS

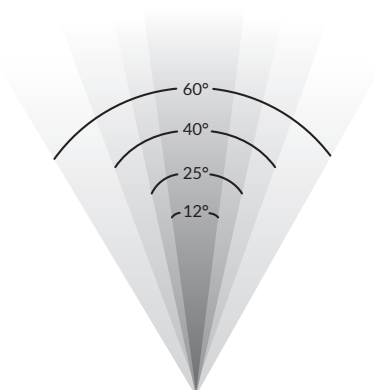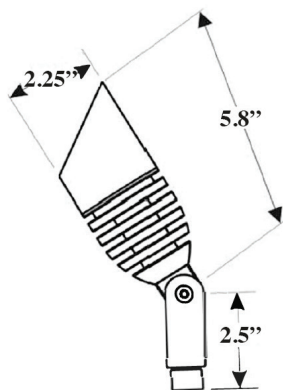

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Compression fit lens.
- Breathable ant guard to eliminate insect infestation.
- Double silicone o-ring gaskets for a tight-fitting shroud.
- Field serviceable and upgradeable LED board.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Clear flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	130LM
	3W	6VA	210LM
	6W	10VA	280LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Intertek

Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

IES files can be found at www.gardenlightled.com





X5 | High Power Spotlight

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

Gone are the bulky high voltage commercial grade lighting solutions. The X5 High Power Spotlight is an excellent flood light option. Great for lighting large tree canopies, structures, buildings and cast outdoor areas. The X5 can produce up to 1500 lumens!

PRODUCT DIMENSIONS & BEAM SPREADS

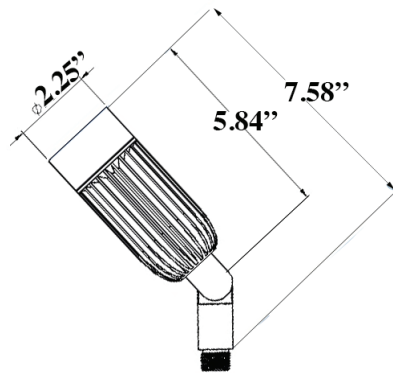

OPTIONAL SHROUD AVAILABLE



FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Compression fit lens.
- Breathable ant guard to eliminate insect infestation.
- Double silicone o-ring gaskets for a tight-fitting shroud.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 39" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Clear flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 16°, 27°, 42°, 78°

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	11W	14VA	1000LM
	15W	18VA	1500LM

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Intertek

Tested to UL standards.

*Indicates stocked items.

IES files can be found at www.gardenlightled.com




V1 | Visionary Series Spotlight

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

This high-quality CNC Machined, E-Coated 6061 Aluminum and Raw Brass direction spotlight is designed to withstand the test of time. They are suitable for most LED MR16 lamps and available in 5 finishes to meet all your outdoor lighting needs.

PRODUCT DIMENSIONS

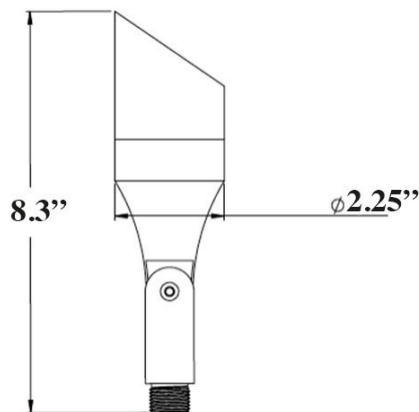

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- Adjustable knuckle for ease of light positioning.
- Compression fit lens.
- Double silicone o-ring gaskets for a tight-fitting shroud.
- Field serviceable.
- IP66 rated.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR), Artisan Brass (ABR)
- **Lead Wire:** 56" 18AWG tinned copper
- **Mounting:** 8.5" LV130 ground stake
- **Lens:** Clear flat
- **Operating Voltage:** 12-15 VAC
- **Lamp:** MR16 (sold separately)



WARRANTY

20 Year Limited Warranty on Housing
3 Year Limited Warranty on Components

CERTIFICATIONS



Tested to UL standards.




MS | Mini Spotlight with Knuckle

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

The Mini Spotlight's compact design allows it to fit into tight spaces and be used to accent important landscaping and architectural features where larger fixtures will not work.

PRODUCT DIMENSIONS & BEAM SPREADS

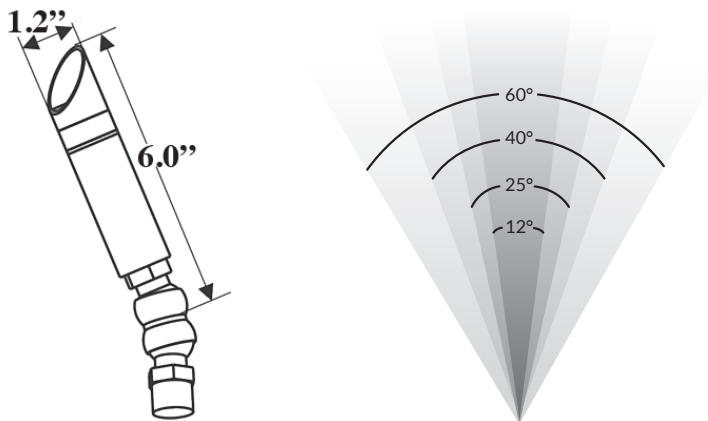

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18AWG tinned copper
- **Mounting:** 8" LV180 Ground Stake
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com





MSL | Mini Spotlight with Leg

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

The Mini Spotlight's compact design allows it to fit into tight spaces and be used to accent important landscaping and architectural features where larger fixtures will not work.

PRODUCT DIMENSIONS & BEAM SPREADS

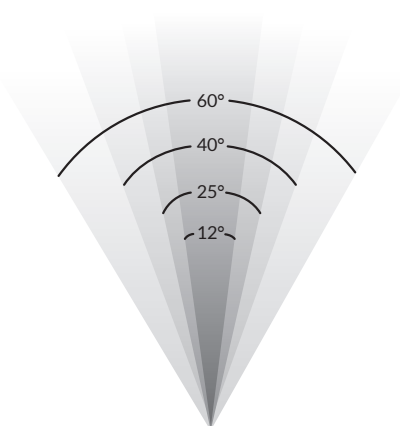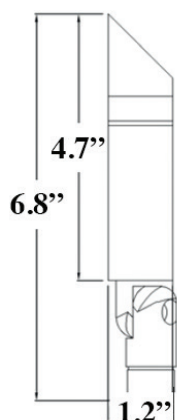

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 22AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




V3 DWN | Visionary Series Downlight

PRODUCT DESCRIPTION

Ideal for downlighting.

The Visionary 3 Downlight is perfect for moonlighting applications. Featuring an extended shroud for tighter focus over a long distance, this fixture creates safe and pleasing environments with the dramatic effect downlighting offers.

PRODUCT DIMENSIONS & BEAM SPREADS

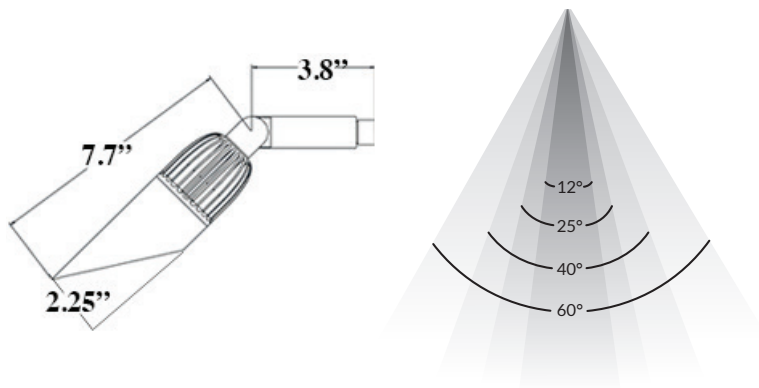

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Double silicone o-ring gaskets for a tight-fitting shroud.
- Vertical heat sink that provides higher thermal resistance.
- Field serviceable and upgradeable LED board.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°
- **Accessories:** Tree mounts and straps (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	3W	6VA	190LM
	4W	7VA	330LM
	6W	10VA	460LM
	9W	15VA	620LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red** ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com




HL | Hanging Light

PRODUCT DESCRIPTION

Ideal for downlighting gazebos and architectural structures.

Garden Light LED's Hanging Light is designed to set your clients' outdoor space apart from the rest. Create a unique, dramatic feel idea for outdoor bar areas, gazebos, outdoor kitchens, architectural structures and more.

PRODUCT DIMENSIONS & BEAM SPREADS

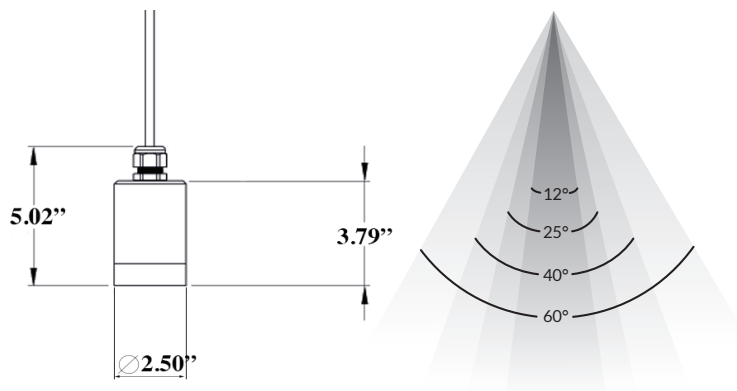

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 15ft 18 AWG SJEOOW tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	160LM
	4W	7VA	400LM
	6W	10VA	540LM
	9W	15VA	740LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red** ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

Intertek

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com




MHL | Mini Hanging Light

PRODUCT DESCRIPTION

Ideal for downlighting gazebos and architectural structures.

Garden Light LED's Mini Hanging Light is designed to set your clients' outdoor space apart from the rest. Create a unique, dramatic feel idea for outdoor bar areas, gazebos, outdoor kitchens, architectural structures and more.

PRODUCT DIMENSIONS & BEAM SPREADS

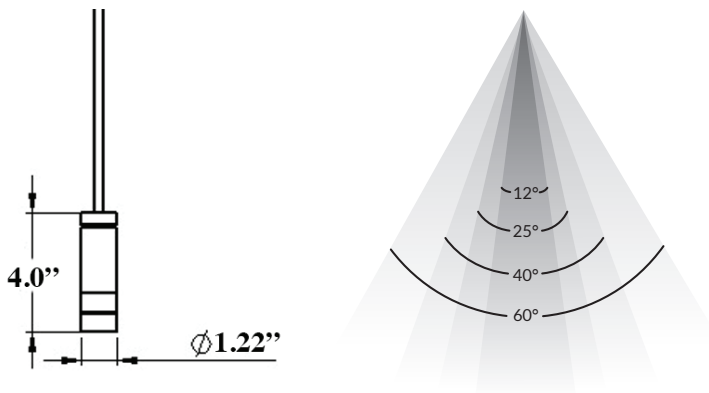

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 15ft 18 AWG SJEOOW tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Intertek

Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




WW | Wall Washer

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

This full size Wall Washer is as functional as it is long lasting and reliable. With an even light output great for signage, property entrances and textured walls, this fixture adds beauty and security to any design.

PRODUCT DIMENSIONS & BEAM SPREAD

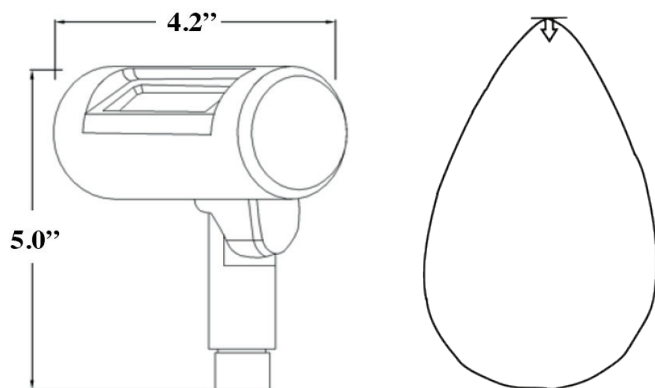

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Frosted flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	130LM
	4W	7VA	210LM
	6W	11VA	280LM
	9W	15VA	380LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red**

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

Intertek

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com




MWW | Mini Wall Washer

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

Like its bigger counterpart, the Wall Washer, the Mini Wall Washer can create fantastic effects while remaining out of sight.

PRODUCT DIMENSIONS & BEAM SPREAD

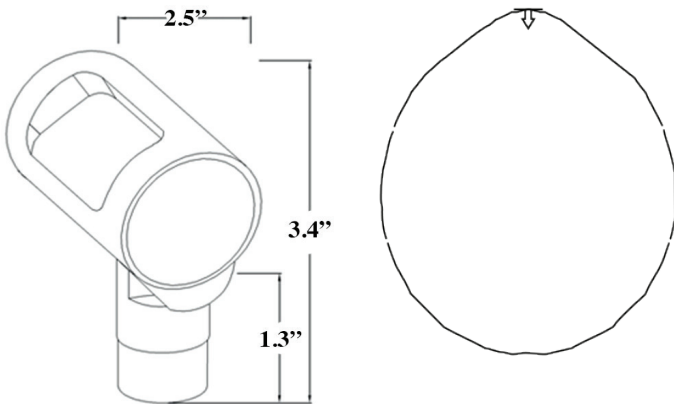

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of positioning.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Frosted flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com





WL | Well Light

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

The Well Light provides the perfect in-grade solution for uplighting on landscapes and hardscapes. Great for illuminating garage doors, architectural accents and so much more.

PRODUCT DIMENSIONS & BEAM SPREADS

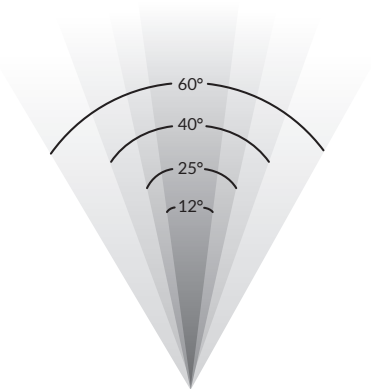

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Strong enough to withstand pressure washers.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 58" 18 AWG SJEOOW tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	160LM
	4W	7VA	400LM
	6W	10VA	540LM
	9W	15VA	740LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red** ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Intertek

Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com




MWL | Mini Well Light

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

Good things really do come in small packages. The Mini Well Light has a variety of uses with its flush-mount installation directly into any surface. Unobtrusive and powerful, this fixture is built to last a lifetime.

PRODUCT DIMENSIONS & BEAM SPREADS

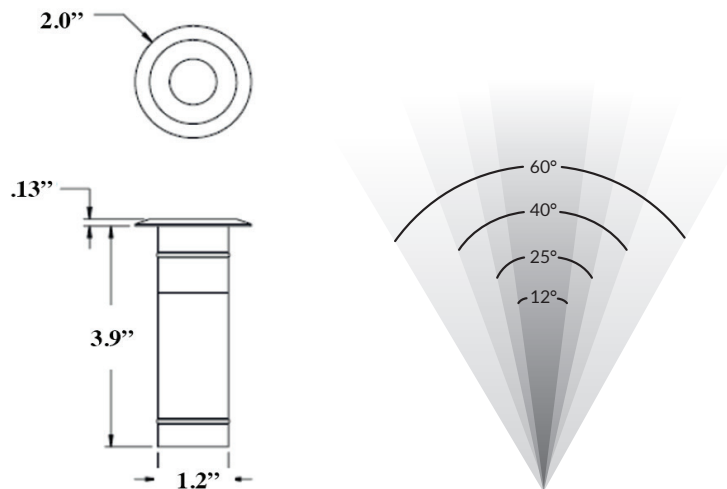

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Strong enough to withstand pressure washers.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°



COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

2700K 5000K Amber Blue Royal Blue
Green Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




EAGLE EYE | Predator Series Recessed Light

PRODUCT DESCRIPTION

Ideal for architectural accents and flat surfaces.

Released as part of the Predator Series line of professional lighting solutions, the Eagle Eye is perfect for any specialty lighting applications such as deck and step lighting as well as architectural accents.

PRODUCT DIMENSIONS & BEAM SPREADS

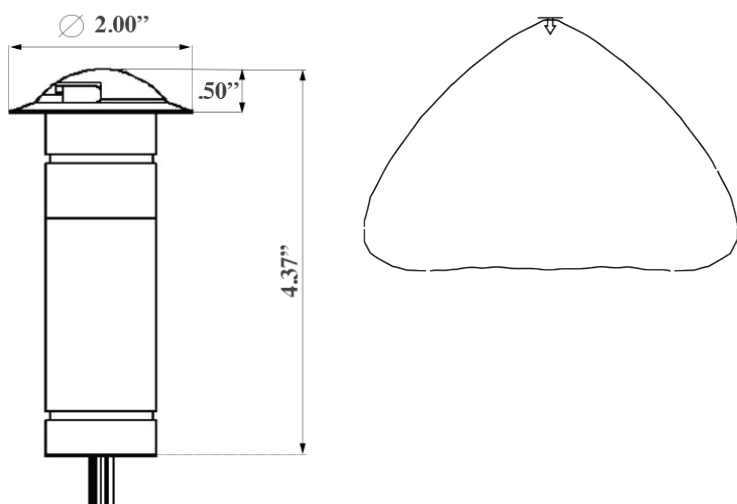

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Strong enough to withstand pressure washers.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+

COLOR TEMPERATURE WATTAGE VA LUMENS

● 3000K*	2W	5VA	110LM
----------	----	-----	-------

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




HAWK EYE | Predator Series Recessed Light

PRODUCT DESCRIPTION

Ideal for architectural accents and stairs.

The Hawk Eye is a great choice when tasked to create an elegant yet safe design. This light casts the perfect beam of light forward and side to side creating depth and perspective.

PRODUCT DIMENSIONS & BEAM SPREADS

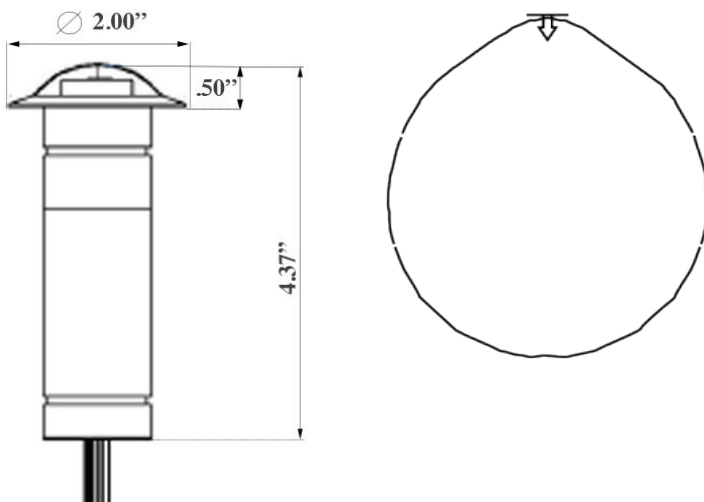

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Strong enough to withstand pressure washers.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+



COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com




FALCON EYE | Predator Series Recessed Light

PRODUCT DESCRIPTION

Ideal for defining borders of high-traffic areas.

The Falcon Eye specialty recessed light fixture creates the perfect narrow beam for many outdoor applications. Simple and elegant, this fixture offers beauty and safety all at the same time.

PRODUCT DIMENSIONS & BEAM SPREADS

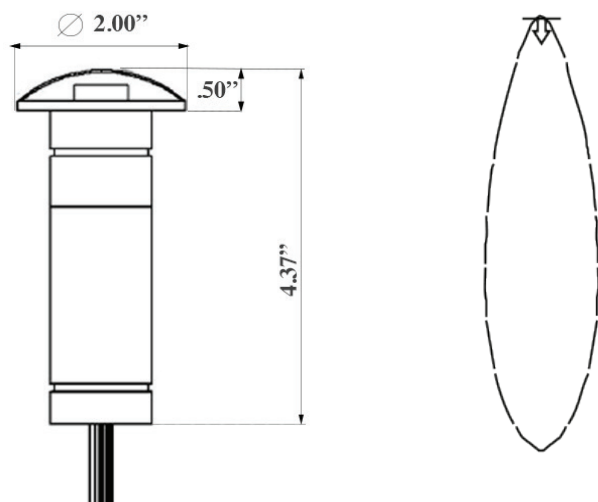

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Strong enough to withstand pressure washers.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+



COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	2W	5VA	105LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K
 ● 5000K
 ● Amber
 ● Blue
 ● Royal Blue
 ● Green
 ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Intertek

Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com




S3 | Submersible Super Saturn

PRODUCT DESCRIPTION

Ideal for docks, ponds, tanks, pools, uplighting, and downlighting.

Make water features truly shine! Durable and completely waterproof, the S3 Submersible Super Saturn is available in 10 rich color temperatures—giving you the flexibility to provide a wide range of water-based lighting effects.

PRODUCT DIMENSIONS & BEAM SPREADS

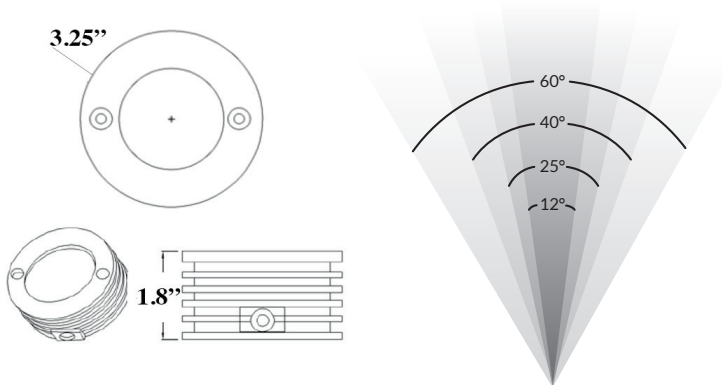

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or stainless steel
- U.S.A. made light engine and driver.
- Built in surge protector.
- Fully submersible.
- IP68 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or stainless steel
- **Finishes:** Black (BLK), Stainless Steel (SS)
- **Lead Wire:** 5ft SJEOOW 18 AWG tinned copper (BLK) and 20ft SJEOOW 18 AWG tinned copper (SS)
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°
- **Accessories:** Swivel mounting bracket (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	110LM
	4W	7VA	190LM
	6W	10VA	330LM
	9W	15VA	630LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red** ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

APPLICATION RESTRICTIONS

Stainless Steel Finish- Fresh Water, Salt Water, Chlorinated Water, Fish Ponds and Fish Tanks. **9W for installation in submersible applications ONLY.**

Black Finish- Fresh water, Fish Ponds and Fish Tanks. **NOT suitable for salt or chlorinated water.**

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.

**Amber not available in 6W or 9W and red not available in 9W.

IES files can be found at www.gardenlightled.com




S2 | Super Saturn

PRODUCT DESCRIPTION

Ideal for uplighting, downlighting, shadowing, wall washing, silhouetting, and architectural accents.

The S2 Super Saturn is our Visionary 2 series lighting re-designed in a surface mount housing. This light opens up a whole new range of opportunities landscape accenting and highlighting water features.

PRODUCT DIMENSIONS & BEAM SPREADS

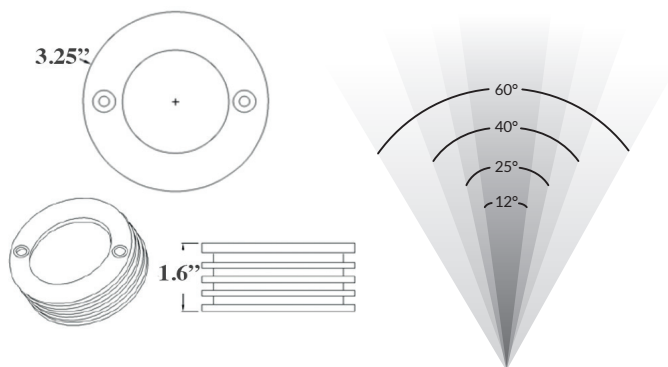

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Clear flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°
- **Accessories:** Swivel mounting bracket (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	210LM
	3W	6VA	340LM
	6W	10VA	480LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red ● Fuchsia ● Lavender

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable. Fuchsia and Lavender require additional lead time above the standard 5-7 business days.*

IES files can be found at www.gardenlightled.com




S1 | Mini Saturn

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, architectural accents, and downlighting.

The S1 Mini Saturn has a clean and compact design but packs a powerful punch. This fixture is perfect for just about anywhere.

PRODUCT DIMENSIONS & BEAM SPREADS

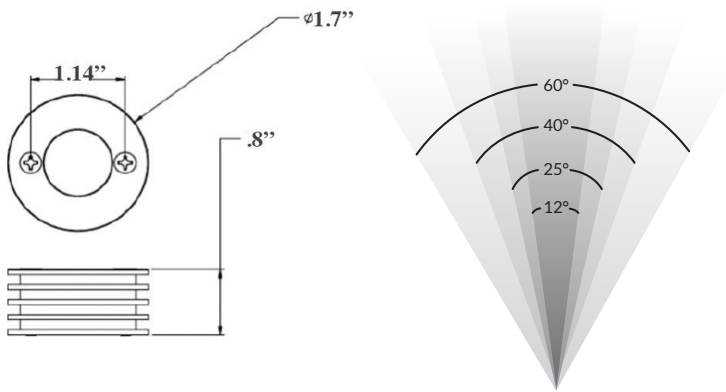

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Lens:** Clear flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°
- **Accessories:** Swivel mounting bracket or shroud (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	2W	5VA	180LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

2700K 5000K Amber Blue Royal Blue
Green Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com





S1H | Saturn Halo (Submersible)

PRODUCT DESCRIPTION

Ideal for uplighting, shadowing, wall washing, silhouetting, architectural accents, downlighting, and fountains.

Like its counterpart the S1 Mini Saturn, the S1 Saturn Halo is also small and compact. With a built-in driver, this fixture can be used virtually anywhere.

PRODUCT DIMENSIONS & BEAM SPREADS

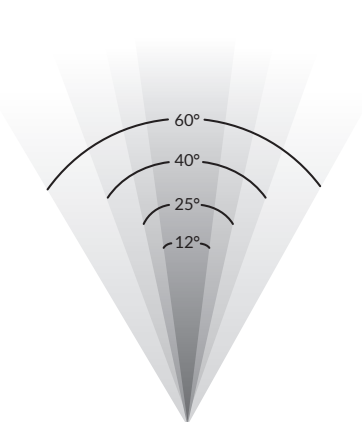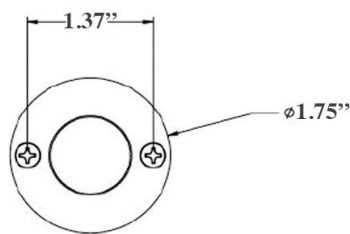

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum, stainless steel or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Fully submersible.
- IP68 rated.**
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum, stainless steel or raw brass
- **Finishes:** Black (BLK), White (WHT), Stainless Steel (SS), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spreads:** 12°, 25°, 40°, 60°
- **Accessories:** Swivel mounting bracket and shroud (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	1W	2VA	130LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K • 5000K • Amber • Blue • Royal Blue
- Green • Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

APPLICATION RESTRICTIONS

Black Finish- Fresh water, Fish Ponds and Fish Tanks.
NOT suitable for salt or chlorinated water. No harsh chemicals.

Stainless Steel Finish- Fresh Water, Salt Water, Chlorinated Water, Fish Ponds and Fish Tanks.

Brass Finish- Fresh water **ONLY. NOT suitable for fish.**

****White Finish-** **NOT suitable for underwater applications.**

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




MM15-II | Micro Max

PRODUCT DESCRIPTION

Ideal for railings, water features, ceiling beam downlighting, walkways, decks, gazebos, statues, planters, lanais, fences, fire pits and benches.

The Micro Max is an LED luminaire you simply cannot get anywhere else. The potential applications for this small outdoor landscape lighting product are as unlimited as the imagination. Small and powerful, this fixture can add life to water features and safety to the areas that surround it.

PRODUCT DIMENSIONS & BEAM SPREAD

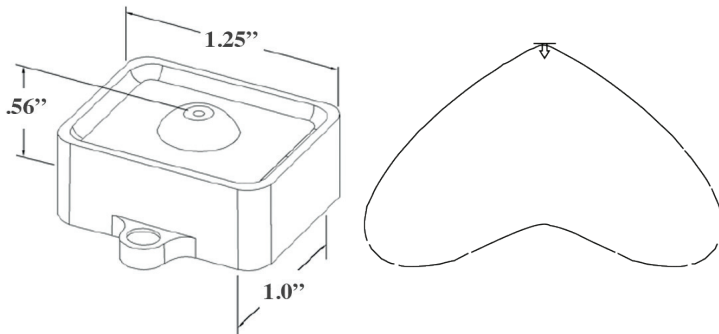


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated. (Fully submersible option available upon special order request)
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°
- **Accessories:** Full or front shields (not included)

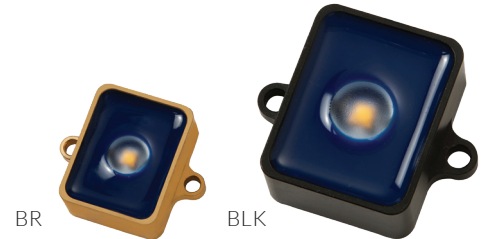

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




TIGER EYE | Micro Series Specialty Light

PRODUCT DESCRIPTION

Ideal for railings and walkways.

The Tiger Eye Micro Series produces a very even light level with a rectangular beam pattern directly beneath the mounting position, making it a great choice for railings and walkways.

PRODUCT DIMENSIONS & BEAM SPREAD

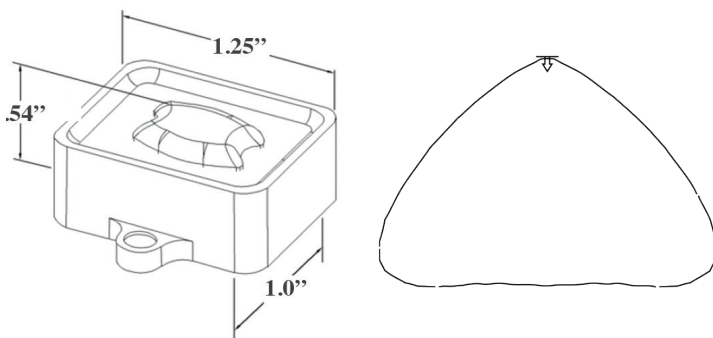


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated. (Fully submersible option available upon special order request)
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Accessories:** Full or front shields (not included)

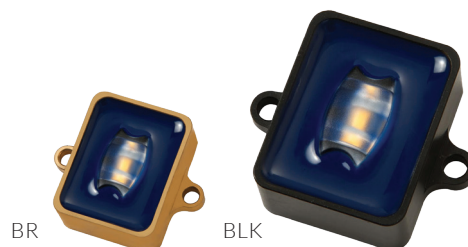

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




OWL | Micro Series Specialty Light

PRODUCT DESCRIPTION

Ideal for benches, countertops, stonewalls, and garages.

With its long linear beam, the Owl Micro Series fixture is your go-to light for outdoor living spaces. With this oblong optic, you can use less fixtures than when using traditional accent lights.

PRODUCT DIMENSIONS & BEAM SPREAD

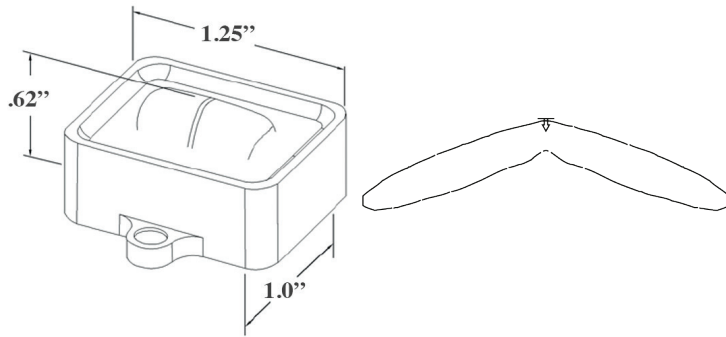

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated. (Fully submersible option available upon special order request)
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Accessories:** Full or front shields (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




RAM | Micro Series Specialty Light

PRODUCT DESCRIPTION

Ideal for ceiling beam downlighting and gazebos.

The Ram Micro Series fixture projects a beam of light that's V-shaped. The beam is projected forward and down from the mounting position with the base of the V illuminating from the light's mounting position.

PRODUCT DIMENSIONS & BEAM SPREAD

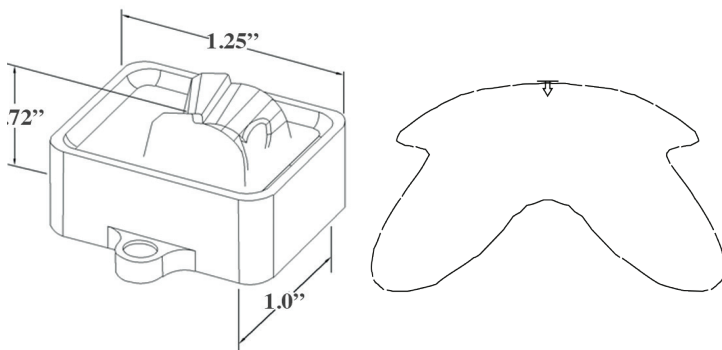


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated. (Fully submersible option available upon special order request)
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Accessories:** Full or front shields (not included)

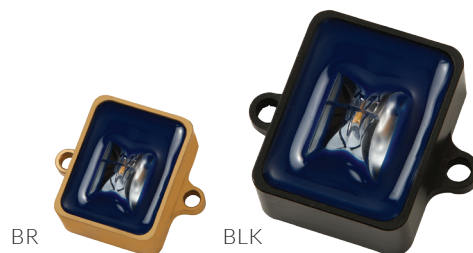

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




ROCK | Micro Series Specialty Light

PRODUCT DESCRIPTION

Ideal for shrubs, statues, and planters.

Projecting a beam of light forward and down from the mounting position, the Rock Micro Series is perfect for illuminating shrubs, statues and planters that are in front of and below the mounting position.

PRODUCT DIMENSIONS & BEAM SPREAD

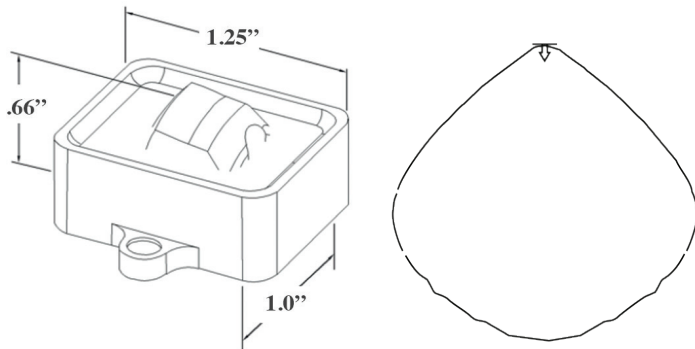


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated. (Fully submersible option available upon special order request)
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Black (BLK), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Accessories:** Full or front shields (not included)

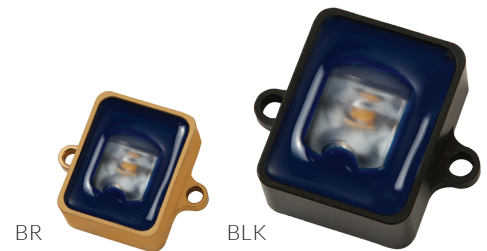

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




RW | Rock Wall

PRODUCT DESCRIPTION

Ideal for decks, railings, gazebos, outdoor kitchens, steps, and fire pits.

The Rock Wall is a timeless fixture used for downlighting. Its unique shape may fool you, but this luminaire is great for fire pits, steps and so much more.

PRODUCT DIMENSIONS

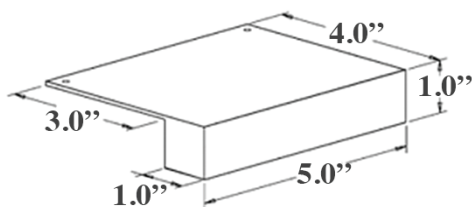


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB)
- **Lead Wire:** 72" SPT-1W tinned copper
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood

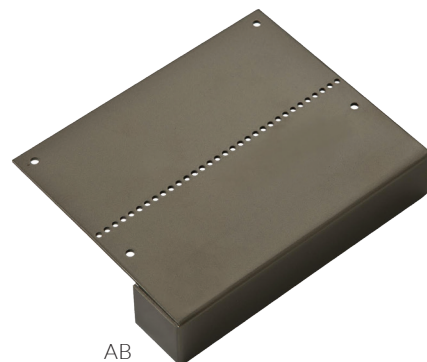

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	3W	5VA	200LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




CW UDL | Up/Down Wall Light

PRODUCT DESCRIPTION

Ideal for decks, railings, pool cages, and wall sconces.

The premier solution for outdoor lighting, the CW Up/Down Wall Light suits many applications and can be mounted up and down or side to side. Fits perfectly on pool cage beams or can be used as a wall sconce.

PRODUCT DIMENSIONS

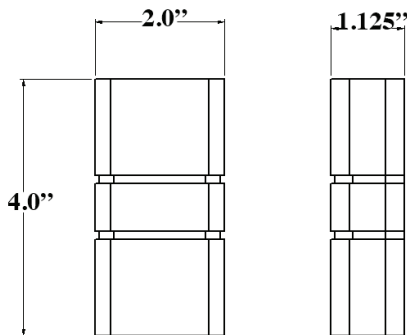

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), White (WHT), Brass (BR)
- **Lead Wire:** 46" 22 AWG tinned copper
- **Mounting:** Bracket included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	2VA	115LM-90LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.




P0-II | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

At only 2.5 inches tall, this powerful little low voltage LED light can wash a large horizontal surface of any outdoor landscape area. This is amongst our most modern and innovative outdoor lighting fixture for use in contemporary landscaping and architecture designs.

PRODUCT DIMENSIONS & BEAM SPREAD

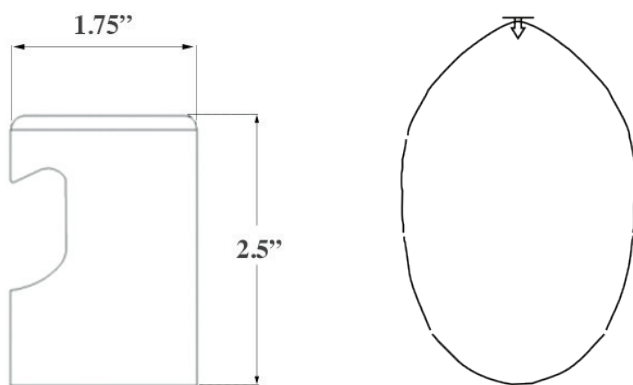

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°



SSA



BR



AB



BLK

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




P1 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The P1 pathway light is one of the sleekest fixtures available. Slender and powerful, this light casts a beam spread that illuminates any pathway perfectly.

PRODUCT DIMENSIONS & BEAM SPREAD

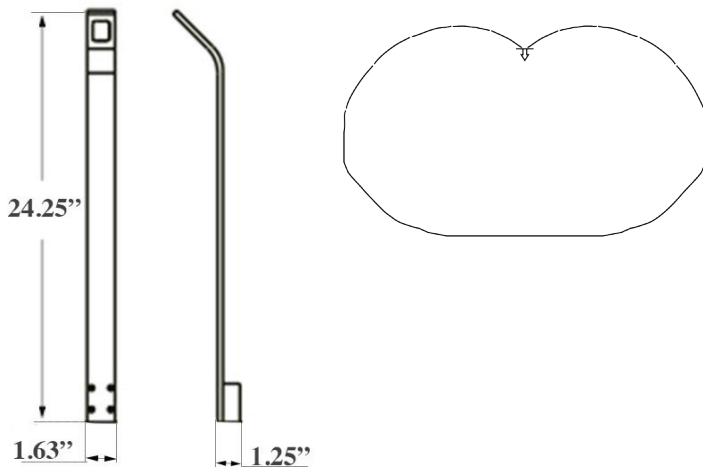

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood
- **Accessories:** Surface mount (not included)



OPTIONAL SURFACE MOUNT AVAILABLE
(NOT INCLUDED)

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




P1.90 | Curved Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The P1.90 curved pathway light is the solution for all your residential and commercial projects. The curved, 90-degree angle casts a wide spread of light onto any surface providing the perfect amount of illumination.

PRODUCT DIMENSIONS

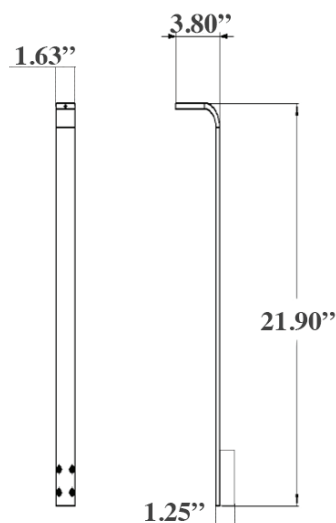

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 36" 18AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°
- **Accessories:** Surface mount (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




P2 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The uniquely shaped P2 path light casts the perfect v-shaped pattern on both sides of the fixture. Best suited for illuminating pathways while adding a bit of flair.

PRODUCT DIMENSIONS

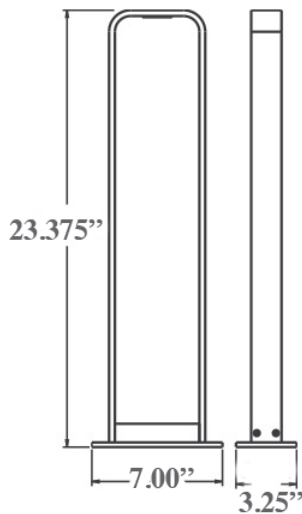

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** Surface mount
- **Lens:** Frosted flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




P3 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The sleek, low profile P3 path light is a fixture you just cannot get anywhere else. Add this path light to your line-up and stand apart from traditional lighting fixtures. Don't let its size fool you. This fixture casts a large spread of light onto horizontal surfaces.

PRODUCT DIMENSIONS & BEAM SPREAD

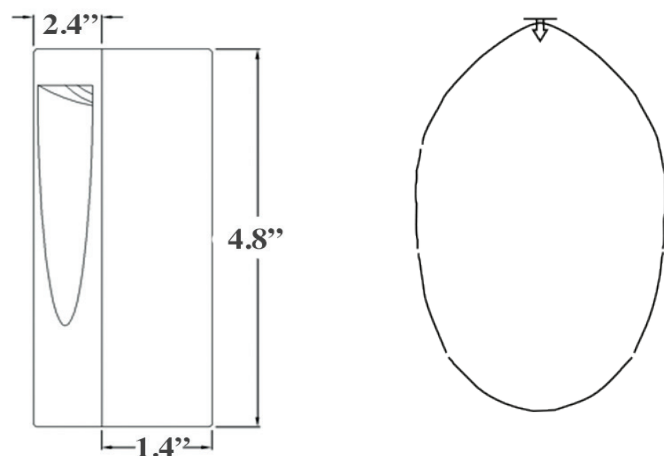

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Lens:** Frosted flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood
- **Accessories:** Surface mount (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com




P4 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

Standing at 19" tall, the P4 path light is the big brother to our P3 path light. With a wider spread than its counter part, this path light can be used for a variety of applications for customers looking for a modern feel.

PRODUCT DIMENSIONS & BEAM SPREAD

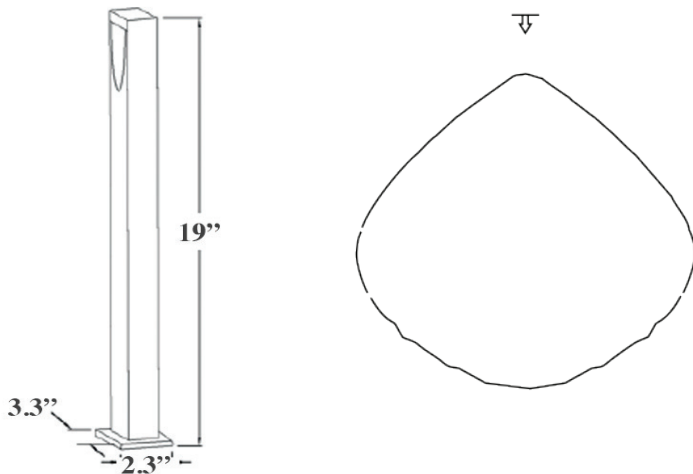

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Stainless Aluminum (SSA)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** Surface mount
- **Lens:** Frosted flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




P9 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The P9 LED pathway light is an adaptation of our highly successful Mini Spotlight. This low-voltage LED landscape light fixture creates an adjustable path light with 180 degrees of total range of motion.

PRODUCT DIMENSIONS & BEAM SPREAD

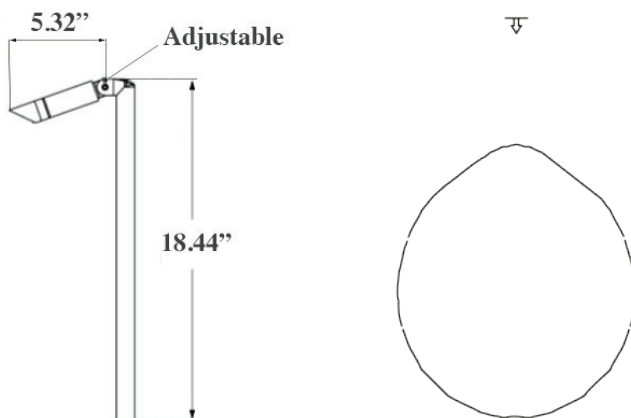

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 46" 22 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




P10 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The P10 LED pathway light is an adaptation of our highly successful Mini Wall Washer. This low-voltage LED landscape light fixture creates an adjustable path light with 140 degrees of total range of motion.

PRODUCT DIMENSIONS & BEAM SPREAD

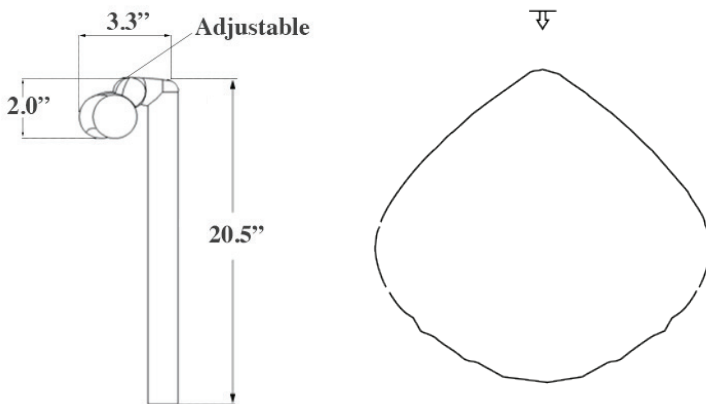

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Tempered frosted glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Lens:** Frosted flat
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com




P11 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and large areas.

Our P11 path light was created specifically for commercial applications. From business buildings to hotels, this state-of-the-art fixture can produce up to 2000 lumens!

PRODUCT DIMENSIONS & BEAM SPREAD

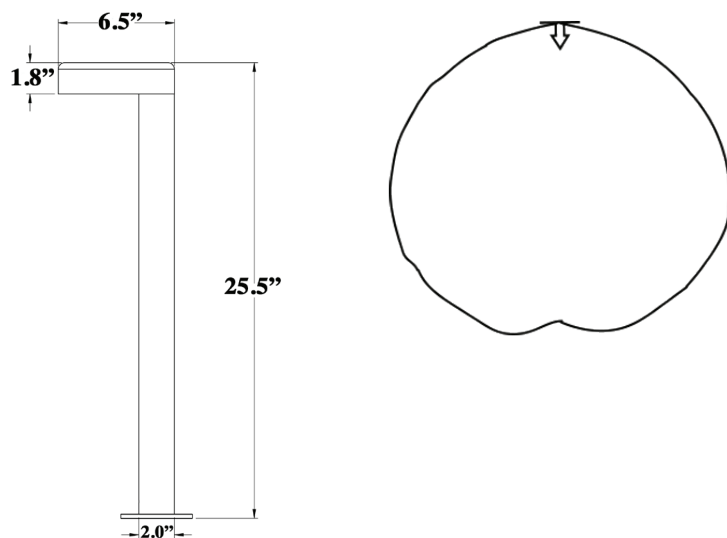

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Post Sizes:** 24" or 36"
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood
- **Accessories:** Mounting base or heavy duty stake (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	3W	6VA	340LM
	9W	10VA	540LM
	12W	15VA	1700LM
	15W	18VA	2000LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber** ● Blue ● Royal Blue
● Green ● Red**

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

**Amber and red not available in 9W, 12W or 15W.

IES files can be found at www.gardenlightled.com




P12 | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

Contemporary yet versatile, this extraordinary P12 Path Light can fit into any style architecture from modern to traditional. Great modern and machined path lighting adding a contemporary solution to a wide range of architecture.

PRODUCT DIMENSIONS & BEAM SPREAD

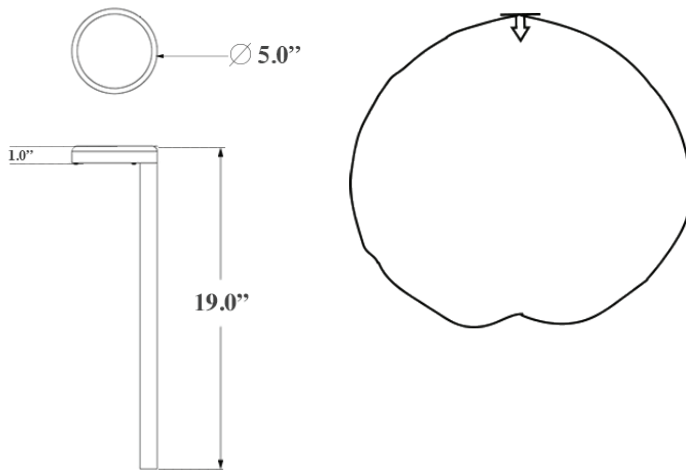

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	230LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




P14 | Path Light (Integrated LED)

PRODUCT DESCRIPTION

Our P14 path light is the best solution for more traditional landscape and architectural design plans. CNC-machined from 6061 aircraft-grade aluminum, this fixture is a perfect choice for residential and commercial properties.

PRODUCT DIMENSIONS

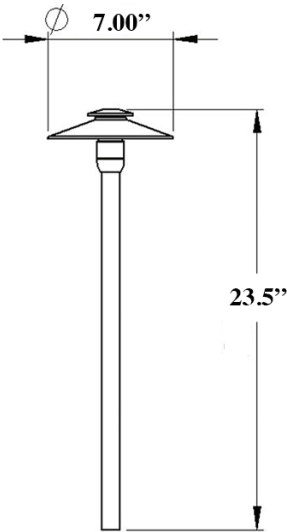

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Breathable ant guard to eliminate insect infestation.
- Field serviceable and upgradeable LED board.
- CREE 2 step binned LEDs with L70 over 80,000 hours.
- IP66 rated.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K	2W	4VA	TBD

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.




P14 | Path Light (Retro Fit)

PRODUCT DESCRIPTION

Our P14 path light is the best solution for more traditional landscape and architectural design plans. CNC-machined from 6061 aircraft-grade aluminum, this fixture is a perfect choice for residential and commercial properties.

PRODUCT DIMENSIONS

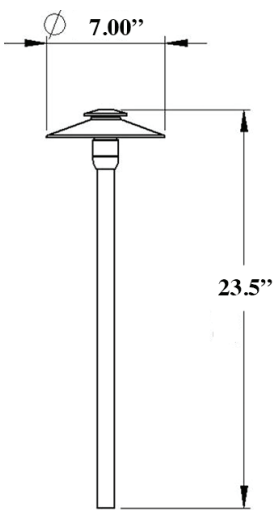

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- Breathable ant guard to eliminate insect infestation.
- Field serviceable.
- IP66 rated.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 36" 18 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Operating Voltage:** 10.5-18 VAC
- **Lamp:** GY6 Bi-Pin (sold separately)
- **Beam Spread:** Flood



WARRANTY

20 Year Limited Warranty on Housing
3 Year Limited Warranty on Components

CERTIFICATIONS



Tested to UL standards.




X-LIGHT SGL | Single Sided

PRODUCT DESCRIPTION

Ideal for pathways, wall sconces, patios, docks, and driveways.

Garden Light LED's latest innovation, the ultra-low-profile X-Light is perfect for hardscapes, docks, walkways, and driveways. This sleek modern design is less than 1" tall and is available in brass and stainless steel.

PRODUCT DIMENSIONS & BEAM SPREADS

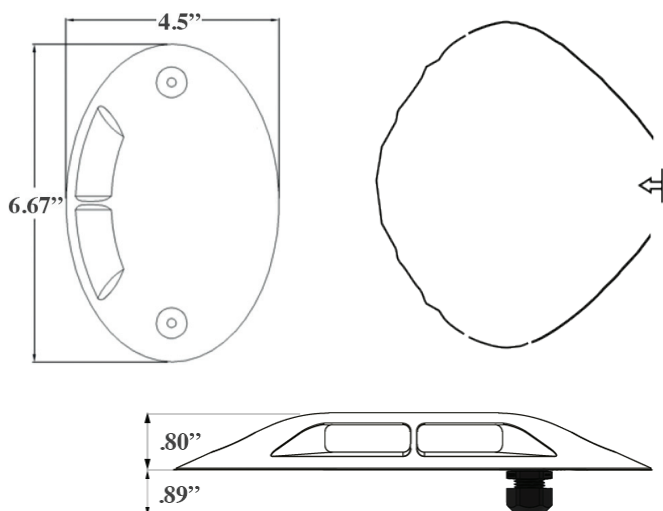

FEATURES & BENEFITS

- Built in the U.S.A.
- Made from stainless steel or brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Neoprene seal to prevent leaks.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Stainless steel or brass
- **Finishes:** Stainless Steel (SS), Brass (BR)
- **Lead Wire:** 60" 18 AWG tinned copper
- **Mounting:** Surface plate
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Optics:** Diffused and Non-Diffused



SS



BR

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	90LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




X-LIGHT DBL | Double Sided

PRODUCT DESCRIPTION

Ideal for pathways, wall sconces, patios, docks, and driveways.

Garden Light LED's latest innovation, the ultra-low-profile X-Light is perfect for hardscapes, docks, walkways, and driveways. This sleek modern design is less than 1" tall and is available in brass and stainless steel.

PRODUCT DIMENSIONS & BEAM SPREADS

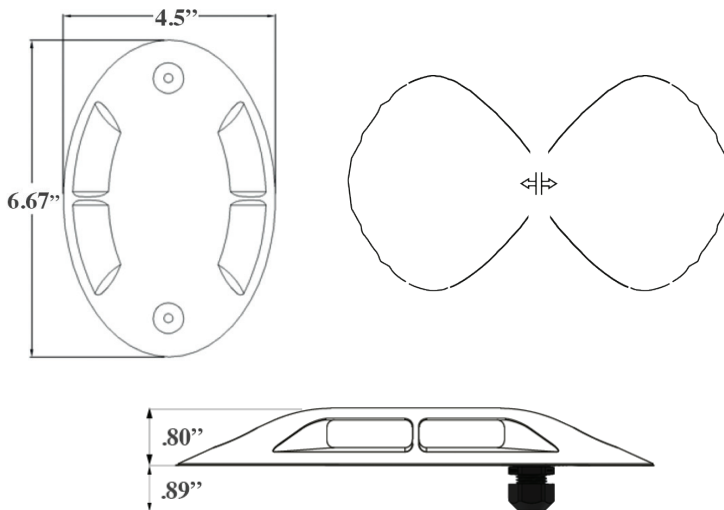

SS



BR

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	4VA	90LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com

FEATURES & BENEFITS

- Built in the U.S.A.
- Made from stainless steel or brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Neoprene seal to prevent leaks.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Stainless steel or brass
- **Finishes:** Stainless Steel (SS), Brass (BR)
- **Lead Wire:** 60" 18 AWG tinned copper
- **Mounting:** Surface plate
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Optics:** Diffused and Non-Diffused




TRADITIONAL LEAF | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

This beautiful, leaf shaped LED landscape path light offers a unique lighting fixture design that is perfect for outdoor spaces, patios, and walkways. Use these one of a kind fixtures to blend in with nature and add beauty and security.

PRODUCT DIMENSIONS & BEAM SPREAD

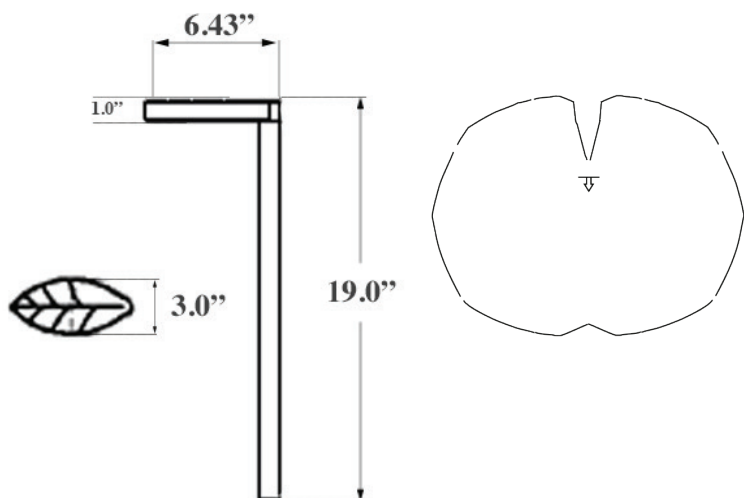

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 38" 22 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




X-LIGHT-SGL | Turtle Friendly Single Sided

PRODUCT DESCRIPTION

Ideal for pathways, wall sconces, patios, docks, and driveways.

Garden Light LED's latest innovation, the ultra-low-profile X-Light is perfect for hardscapes, docks, walkways, and driveways. This sleek modern design is less than 1" tall and is available in brass and stainless steel. This fixture meets the requirements of the Florida Fish and Wildlife Conservation Commission (FWC) for decreased lighting pollution on or near beachfront property to protect the sea turtles.

PRODUCT DIMENSIONS & BEAM SPREADS

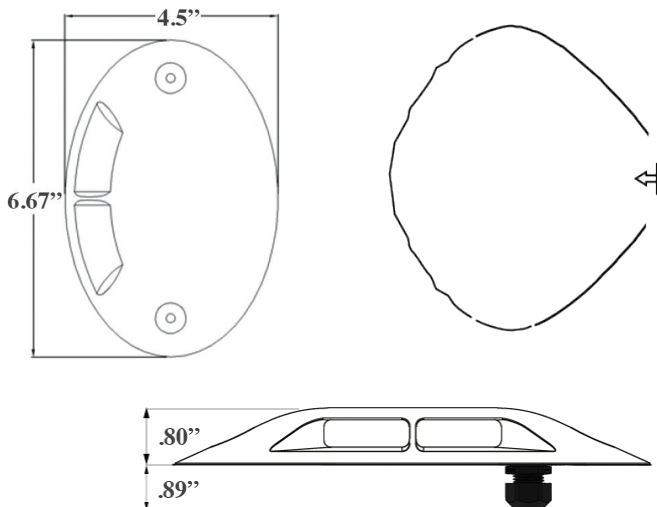

SS



BR

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA
Amber*	2W	3VA
Red*	2W	3VA
Extreme Red*	2W	3VA
Red Orange*	2W	3VA

FEATURES & BENEFITS

- Built in the U.S.A.
- Made from stainless steel or brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Neoprene seal to prevent leaks.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Stainless steel or brass
- **Finishes:** Stainless Steel (SS), Brass (BR)
- **Lead Wire:** 60" 18 AWG tinned copper
- **Mounting:** Surface plate included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Optics:** Diffused and Non-Diffused

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




X-LIGHT-DBL-TF | Turtle Friendly Double Sided

PRODUCT DESCRIPTION

Ideal for pathways, wall sconces, patios, docks, and driveways.

Garden Light LED's latest innovation, the ultra-low-profile X-Light is perfect for hardscapes, docks, walkways, and driveways. This sleek modern design is less than 1" tall and is available in brass and stainless steel. This fixture meets the requirements of the Florida Fish and Wildlife Conservation Commission (FWC) for decreased lighting pollution on or near beachfront property to protect the sea turtles.

PRODUCT DIMENSIONS & BEAM SPREADS

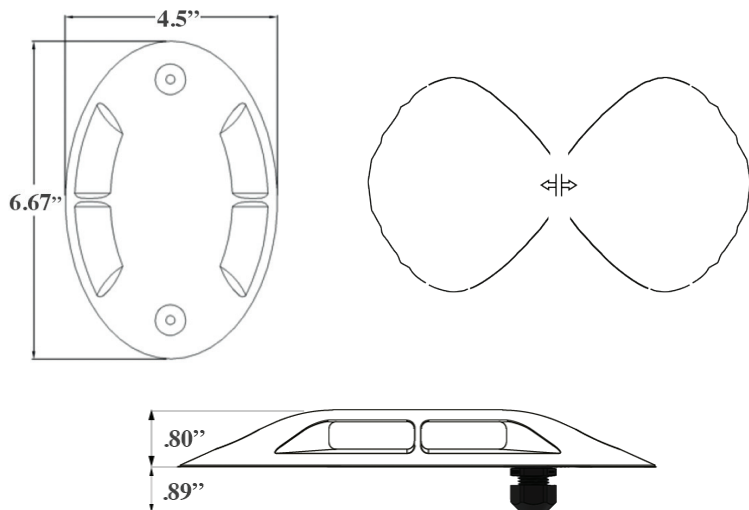

FEATURES & BENEFITS

- Built in the U.S.A.
- Made from stainless steel or brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Neoprene seal to prevent leaks.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Stainless steel or brass
- **Finishes:** Stainless Steel (SS), Brass (BR)
- **Lead Wire:** 60" 18 AWG tinned copper
- **Mounting:** Surface plate included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Optics:** Diffused and Non-Diffused



SS



BR

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA
● Amber*	2W	3VA
● Red*	2W	3VA
● Extreme Red*	2W	3VA
● Red Orange*	2W	3VA

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.




MAPLE LEAF | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The LED Maple Leaf Path light is perfect for all-weather outdoor living spaces, including sidewalks, walkways, and pathways especially where the design of the fixture matches the landscape environment you are designing for.

PRODUCT DIMENSIONS & BEAM SPREAD

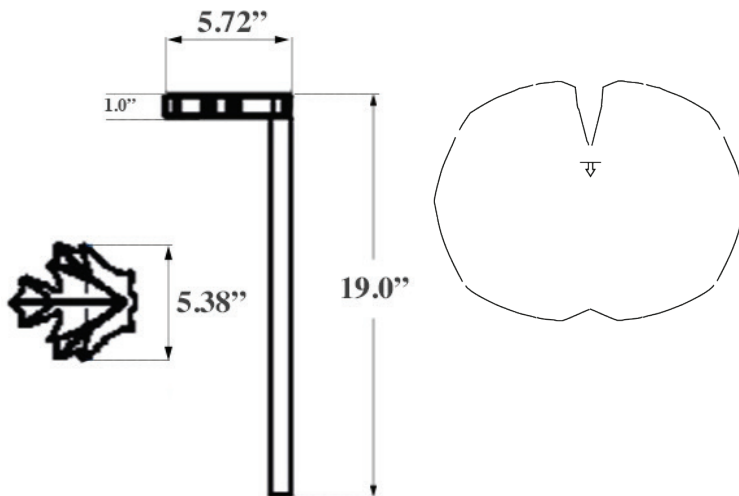

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 38\" 22 AWG tinned copper
- **Mounting:** 8.5\" LV131 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

2700K 5000K Amber Blue Royal Blue
Green Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




TROPICAL LEAF | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The tropical leaf shaped LED landscape pathway light offers a unique lighting fixture design that is perfect for all outdoor spaces, patios, and walkways particularly when customers have tropical plant life as part of their natural landscaping.

PRODUCT DIMENSIONS & BEAM SPREAD

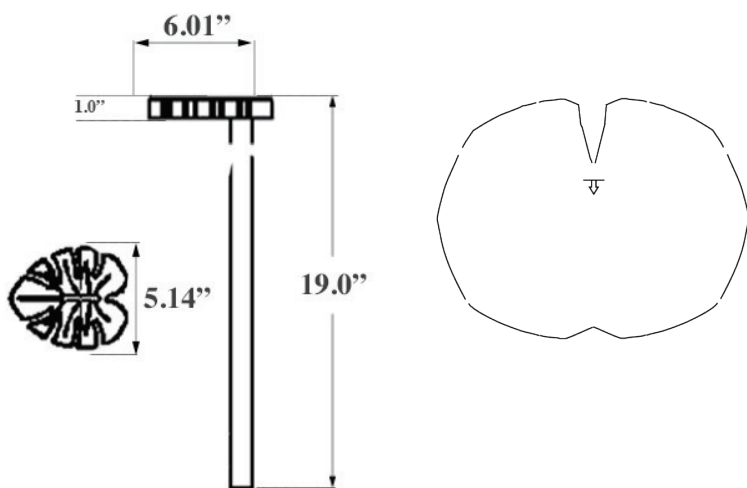

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), Stainless Aluminum (SSA)
- **Lead Wire:** 38\" 22 AWG tinned copper
- **Mounting:** 8.5\" LV131 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com




PL005 LED | Brass Tiki 5" Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The PL005 brass path light is the solution for your more traditional landscape designs. This fixture has been upgraded to an LED light engine for a significantly brighter and more efficient output.

PRODUCT DIMENSIONS

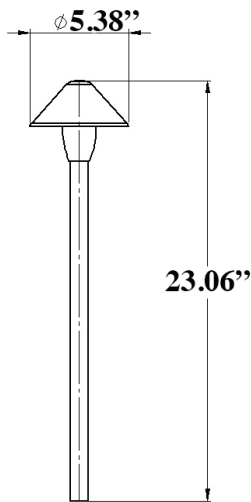

FEATURES & BENEFITS

- Built in the U.S.A.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Solid brass
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



SOLID BRASS

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




PL006 LED | Brass Tiki 7" Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The PL006 brass path light is the solution for your more traditional landscape designs. This fixture has been upgraded to an LED light engine for a significantly brighter and more efficient output.

PRODUCT DIMENSIONS

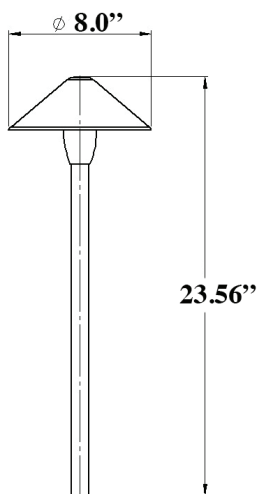

FEATURES & BENEFITS

- Built in the U.S.A.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Solid brass
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



SOLID BRASS

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.




PL013 LED | Brass Villa Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The PL013 brass path light is the solution for your more traditional landscape designs. This fixture has been upgraded to an LED light engine for a significantly brighter and more efficient output.

PRODUCT DIMENSIONS

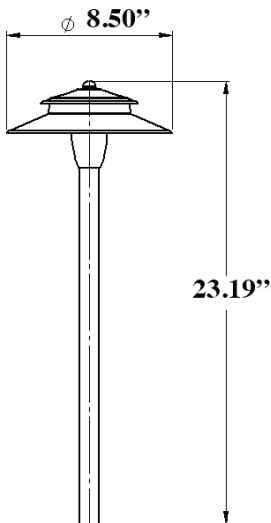

FEATURES & BENEFITS

- Built in the U.S.A.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Solid brass
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8" LV180 Ground Stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



SOLID BRASS

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

2700K 5000K Amber Blue Royal Blue
Green Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




PL800 LED | Brass Mushroom Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The PL800 brass path light is the solution for your more traditional landscape designs. This fixture has been upgraded to an LED light engine for a significantly brighter and more efficient output.

PRODUCT DIMENSIONS

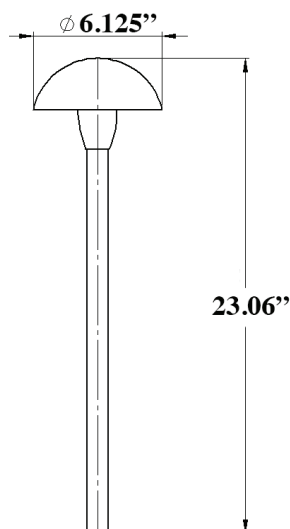

FEATURES & BENEFITS

- Built in the U.S.A.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Solid brass
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



SOLID BRASS

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.




F9020 LED | Miami Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas.

The Miami path light is our original light designed for landscape lighting walkway applications. These attractive, low voltage fixtures will enhance both beauty and safety.

PRODUCT DIMENSIONS

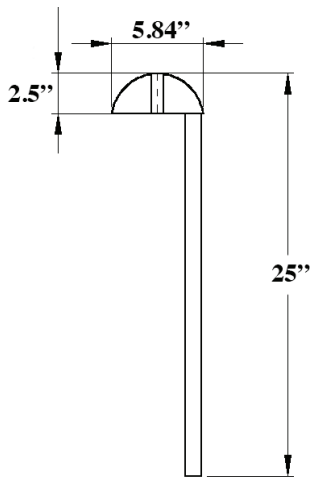

FEATURES & BENEFITS

- Built in the U.S.A.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Field serviceable.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** Die cast aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8" LV180 ground stake
- **Driver System:** External
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	2W	5VA	160LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*




DL15-II | Mini Deck Light

PRODUCT DESCRIPTION

Ideal for decks, railings, wall mounts, step lighting, and fences.

The Mini Deck Light can be easily mounted under railings to illuminate steps or used on fences to provide safety. With the Micro Max integrated light engine, this fixture is small but powerful.

PRODUCT DIMENSIONS & BEAM SPREAD

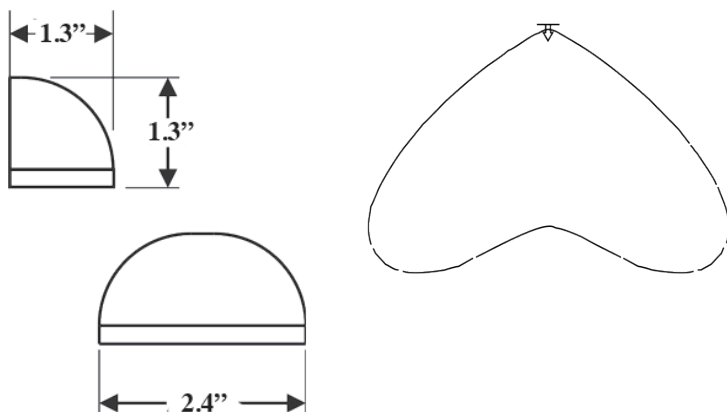

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), White (WHT), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Mounting:** Bracket included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°
- **Accessories:** Deck light shrouds (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K 5000K Amber Blue Royal Blue
- Green Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com




DL20 | Large Deck Light

PRODUCT DESCRIPTION

Ideal for decks, railings, wall mounts, step lighting, and fences.

The Large Deck Light can be easily mounted under railings to illuminate steps or used on fences to provide safety. With the Micro Max integrated light engine, this fixture provides beauty and safety.

PRODUCT DIMENSIONS & BEAM SPREAD

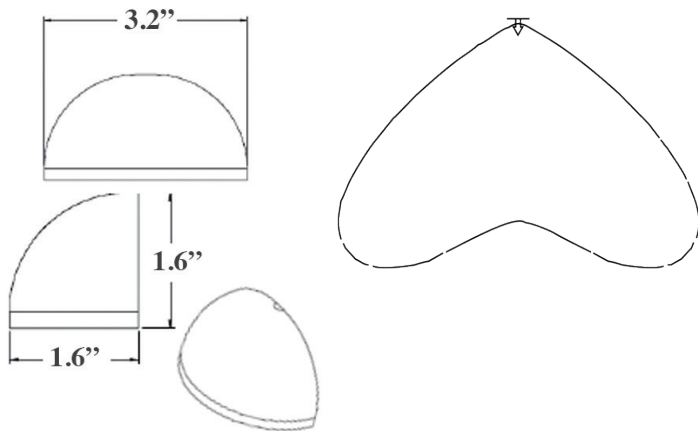


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Mounting:** Bracket included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°

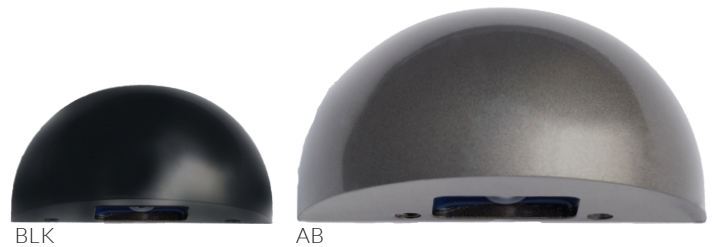

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

● 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com






DL15 CURVE | Deck Light Curve

PRODUCT DESCRIPTION

Ideal for decks, railings, wall mounts, step lighting, and fences.

With its unique housing design, the Deck Light Curve is used to emphasize or re-define the overall visual composition of any wall, steps or even decks.

PRODUCT DIMENSIONS & BEAM SPREAD

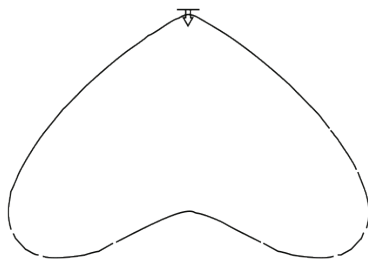


FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK), White (WHT), Stainless Aluminum (SSA)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Mounting:** Bracket included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°




SSA



WHT



BLK

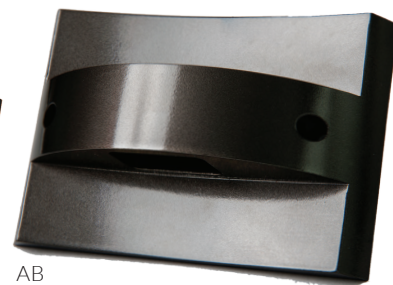

AB

POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K
 ● 5000K
 ● Amber
 ● Blue
 ● Royal Blue
 ● Green
 ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com